

T-BIANCA 10W RGBW SERIES - ADJUSTABLE TRIMS

T-BIANCA SERIES 10W RGBW Kit is a complete unit including the luminaire, trim and housing.



DL Dimmable Lighting
0 to 100% flicker free dimming



TL Tunable Lighting



RGBW RGBW



Working Temperature
-10°C to +40°C



5 Year Limited Warranty



UL US LISTED

MODEL CODES / ROUND TRIM OPTIONS

20D	40D	COLOR
TB-150-11-10W-RGBW-W20-IP20	TB-150-11-10W-RGBW-W40-IP20	<input type="checkbox"/>
TB-150-22-10W-RGBW-B20-IP20	TB-150-22-10W-RGBW-B40-IP20	<input checked="" type="checkbox"/>
TB-100-11-10W-RGBW-W20-IP20	TB-100-11-10W-RGBW-W40-IP20	<input type="checkbox"/>



Matte Black
(22)



White / Shower Trim
(1)

SPECIFICATIONS

Wattage	10 Watts	
Color Temperature	RGBW	
Beam Angle	20D	40D
Total Lumens	480 lm	525 lm
LED CRI	≥95Ra (White chip only)	
Input Voltage	48 Volts, RJ45	
LED	COB	
LM Rating	LM-80	
Trim Dimensions	Round Trim: Ø 4.45" x 1.20" / Ø 113mm x 30.5mm Square Trim: 4.27" x 4.27" x 1.20" / 108.5mm x 108.5mm x 30.5mm	
Ceiling Cut-out	Ø 3.54" / Ø 90mm	
Certifications	cULus E476753	
Compatible Decoder	DMX-SR-2112 Decoder	
Power Supply	PS-SR2112-96 - Power Supply 96W	
Working Temperature	-10C to 40C	
IP Grade	IP20 and IP65	
Lifespan	50,000 Hours	
Warranty	5 Year Limited Warranty	

MODEL CODES / SQUARE TRIM OPTIONS

20D	40D	COLOR
TB-650-11-10W-RGBW-W20-IP20	TB-650-11-10W-RGBW-W40-IP20	<input type="checkbox"/>
TB-650-22-10W-RGBW-B20-IP20	TB-650-22-10W-RGBW-B40-IP20	<input checked="" type="checkbox"/>
TB-700-11-10W-RGBW-W20-IP20	TB-700-11-10W-RGBW-W40-IP20	<input type="checkbox"/>



Matte Black
(22)



White / Shower Trim
(1)

COMPATIBLE TRIMS


TB-150-10W-RGBW | TB-100-10W-RGBW / Round Adjustable Trim



TRIM FINISH




TRIM DIMENSIONS

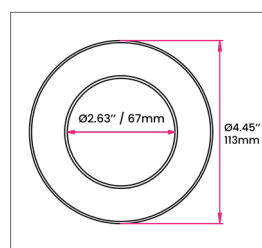

APERTURE
 Ø 2.63" / 67mm

TRIM
 Ø 4.45" / 113mm



3.04" x 1.20" / 77.2 x 30.5mm

OPTICS




TB-650-10W-RGBW | TB-700-10W-RGBW / Square Adjustable Trim



TRIM FINISH




TRIM DIMENSIONS

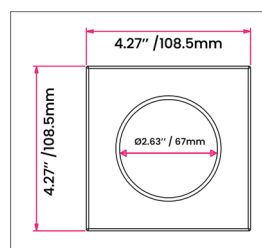


APERTURE
 Ø 2.63" / 67mm

TRIM
 4.27" x 4.27"
 108.5 x 108.5mm



3.04" x 1.20" / 77.2 x 30.5mm

OPTICS






PRE-CONSTRUCTION PLATE & AIR TIGHT CAN


Designed for direct contact with insulation. Can be installed in 1/2" to 1 1/2" thick ceilings. Includes adjustable hanger bars

Pre-Construction Plate	T-NCMP
Housing	T-H-9-CAN
Ceiling Cut-out / Round Trim	Ø 3.54" / Ø 90mm
Ceiling Thickness	1/2" / 12.7mm to 1 1/2" / 38.1mm

PRE-CONSTRUCTION PLATE | T-NCMP

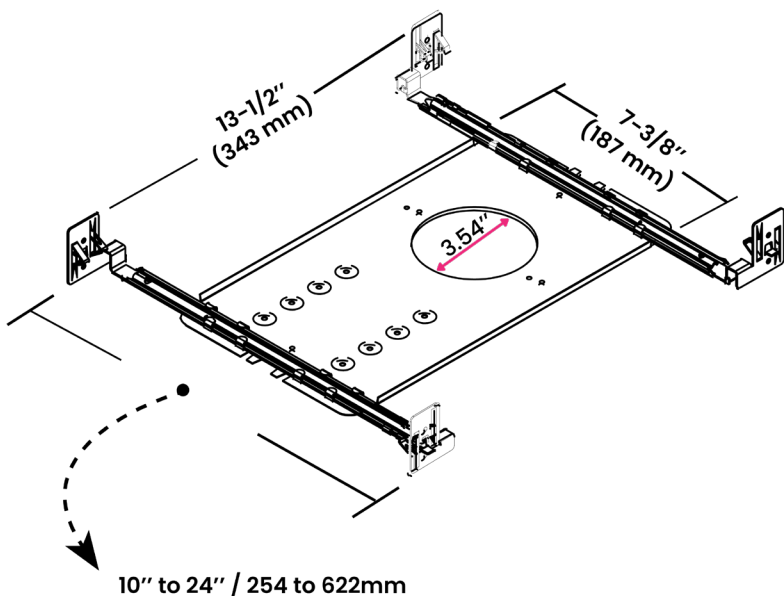

HOUSING | T-H-9-CAN

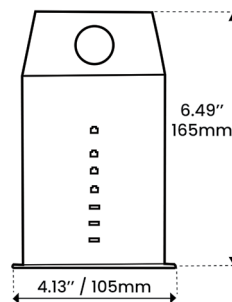

Length:	13.5 Inch / 343mm
Height:	7.75 Inch / 187mm
Adjustable Brackets	Max: 24 Inch / 622mm Min: 10 Inch / 254mm

COMPATIBLE DECODER



DMX DECODER
DMX-SR-2112


COMPATIBLE POWER SUPPLY




POWER SUPPLY
PS-SR2112-96

PHOTOMETRIC INFORMATION / 20D

Luminous Intensity Distribution Curve

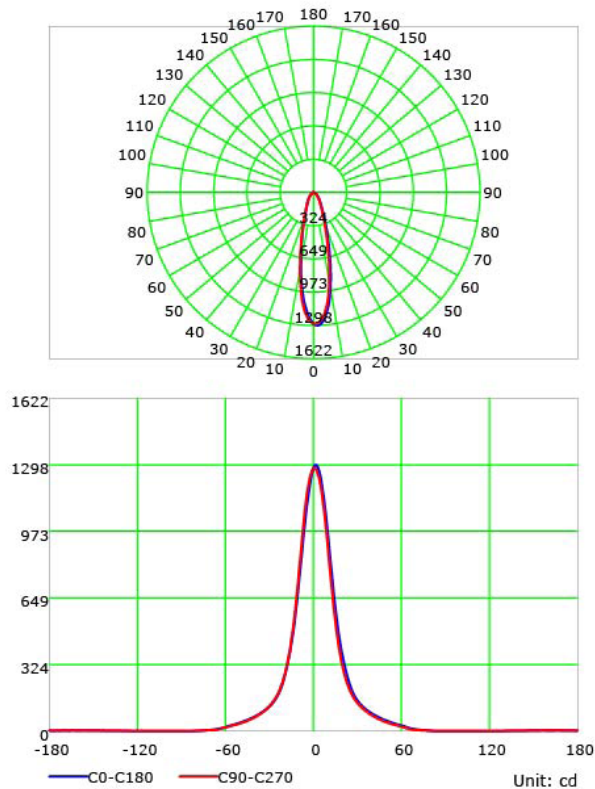


Illuminance at a Distance

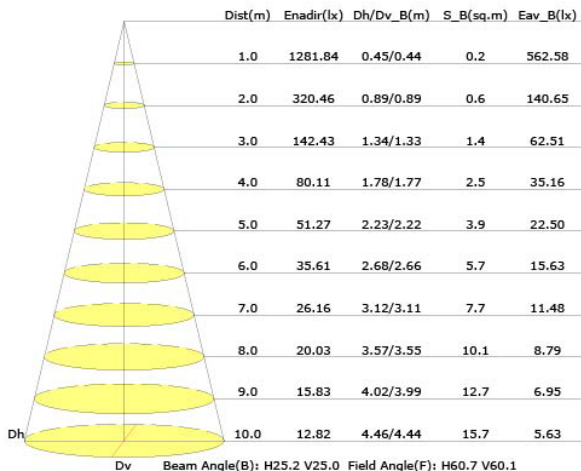

PHOTOMETRIC INFORMATION / 40D

Luminous Intensity Distribution Curve

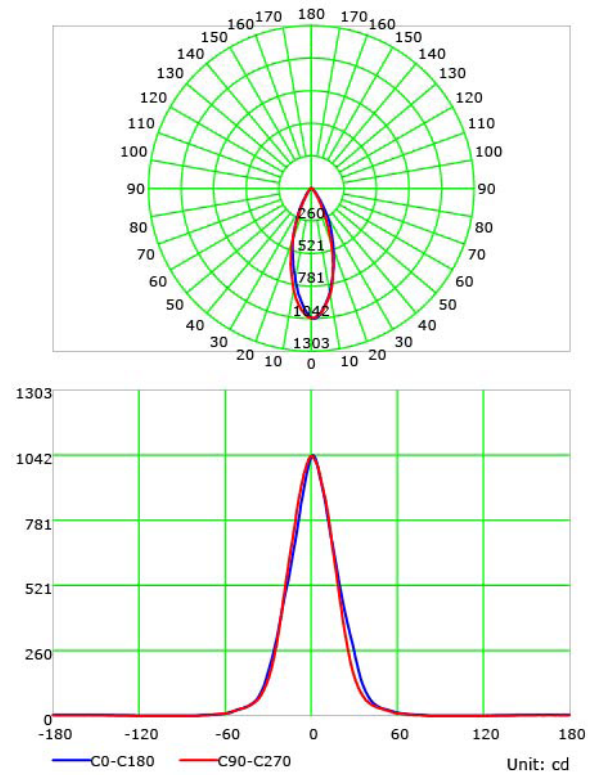

Illuminance at a Distance

