




VI-20W-RGBW-SERIES

VI-20W RGBW SERIES – TRIM & TRIMLESS OPTIONS

VI-20W RGBW SERIES KIT is a high performance RGBW luminaire that can be easily installed into any residential space. The VI series delivers performance and beautiful aesthetics. Available in open faceplate option with a trim or trimless.

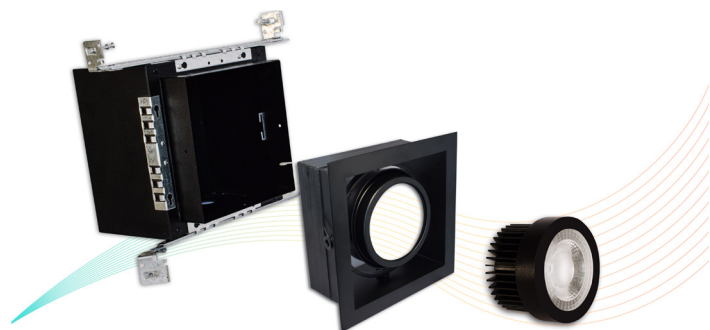

- Dimmable Lighting**
0 to 100% flicker free dimming
- Tunable Lighting**
- RGBW**
- Working Temperature**
-10°C to 40°C
- 5 Year Limited Warranty**
- UL US LISTED**

SPECIFICATIONS

Wattage	20 Watts
Color Temperature	RGBW
Beam Angle	40D
Total Lumens	1200 lm
LED CRI	≥95Ra (white chip only)
Input Voltage	48 Volts, RJ45
LED	COB
LM Rating	LM-80
Trim Dimensions	7.95" x 7.95" / 202mm x 202mm
Ceiling Cut-out	7.36" x 7.36" / 187mm x 187mm
Certifications	cULus E476753
Compatible Decoder	DMX-SR-2112 Decoder
Power Supply	PS-SR2112-96 - Power Supply 96W
Working Temperature	-10C to 40C
IP Grade	IP20 and IP65
Lifespan	50,000 Hours
Warranty	5 Year Limited Warranty

TRIM OPTIONS

KITS MODEL CODES	
V1-20W-RGBW-W40-IP20	V Series Kit, V1 Trim with 20W, White Bulb, 40D, IP20
V1-20W-RGBW-B40-IP20	V Series Kit, V1 Trim with 20W RIVA Bulb, Black Bulb, 40D, IP20



TRIMLESS OPTIONS

KITS MODEL CODES	
V1-20W-RGBW-W40-TL-IP20	V Series Kit, V1 Trim with RIVA 20W Bulb, White Bulb, 40D, Trimless, IP20
V1-20W-RGBW-B40-TL-IP20	V series Kit, V1 Trim with RIVA 20W Bulb, Black Bulb, 40D, Trimless, IP20





V1-20W-RGBW-SERIES


HOUSING | V1-12/36W-HSG

Hanger bars can be adjusted from 14 ½" to 25", to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for easy installation.

**The die-cast aluminum heat sink is painted black.*

Housing	V1-12/36W-HSG
Ceiling Cut-out	7.36" x 7.36" / 187mm x 187mm
Ceiling Thickness	½" / 12.7mm to 1 ½" / 38.1mm

OVERALL DIMENSIONS

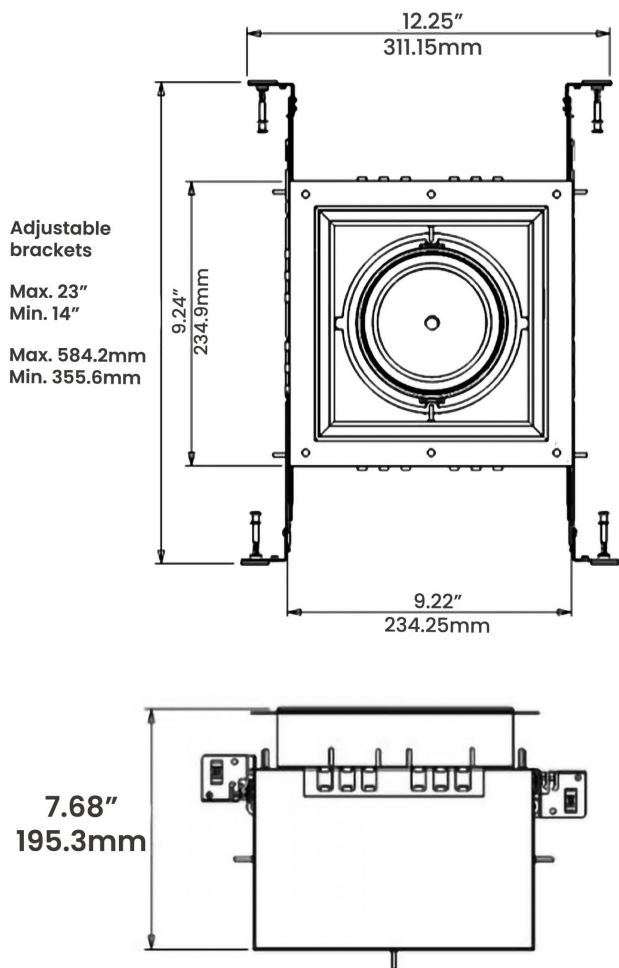

Length:	9.24 Inch / 234.9mm
Height:	7.68 Inch / 195.3mm
Width:	9.22 Inch / 234.25mm
Adjustable Brackets:	Max: 23 Inch / 584.2mm Min: 14 Inch / 355.6mm

COMPATIBLE DECODER





DMX DECODER
DMX-SR-2112

COMPATIBLE POWER SUPPLY



POWER SUPPLY
PS-SR2112-96

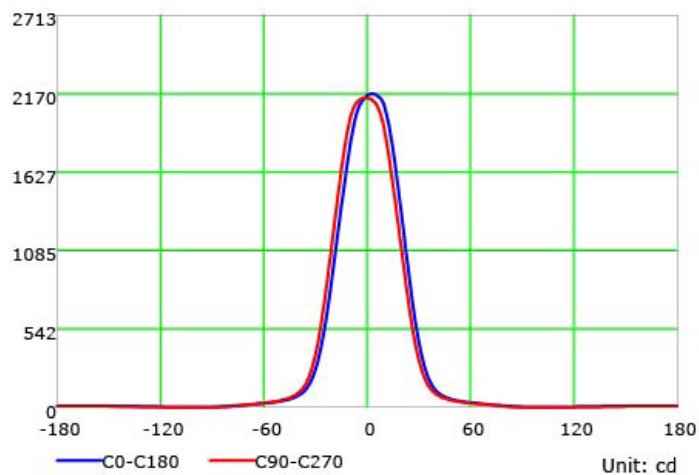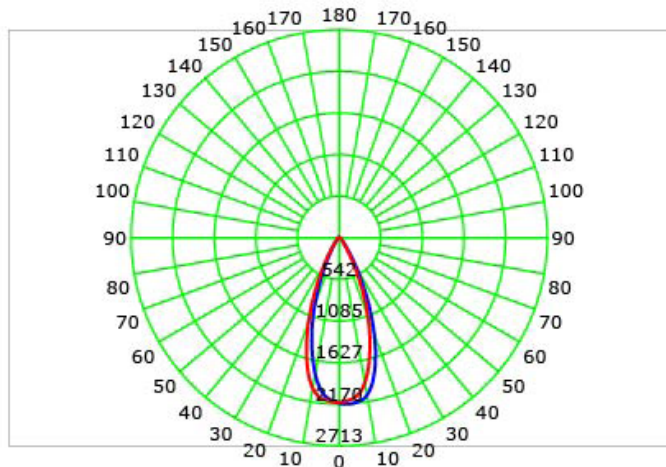PHOTOMETRIC INFORMATION / 40D
Luminous Intensity Distribution Curve

Illuminance at a Distance
