




V1-9W BR SERIES - TRIM / TRIMLESS OPTIONS

This 9W tunable white luminaire has a 95+ CRI light engine producing 650 lumens. The V1 series delivers performance and beautiful aesthetics. Available in open and closed faceplate options with a trim or trimless.

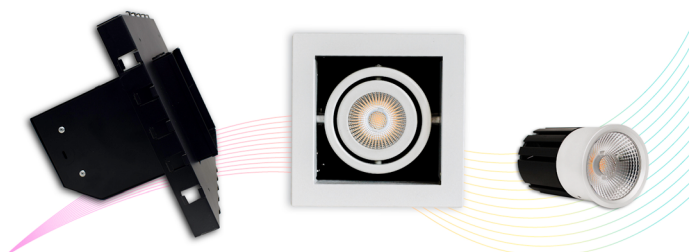


SPECIFICATIONS

Wattage	9 Watts		
Color Temperature	1800K - 4000K	2200K - 5000K	2700K - 6500K
Beam Angle	20D		40D
Total Lumens	550 lm - 650 lm		
LED CRI	≥95Ra		
Input Voltage	48 Volts, RJ45		
LED	COB		
LM Rating	LM-80		
Trim Dimensions	5.02" x 5.02" / 127.6mm x 127.6mm		
Ceiling Cut-out	4.5" x 4.5" / 114.3mm x 114.3mm		
Certifications	cULus E476753, JA8 Title 24		
Compatible Decoder	DMX-SR-2112 Decoder		
Power Supply	PS-SR2112-96 - Power Supply 96W		
Working Temperature	-10C to 40C		
IP Grade	IP20 Standard		
Lifespan	50,000 Hours		
Warranty	5 Year Limited Warranty		

MODEL CODES / TRIM OPTIONS

KITS OPEN TRIM	KITS CLOSED TRIM
V1-9W-11-BR18-40K-20-OP	V1-9W-11-BR18-40K-20-CL
V1-9W-11-BR18-40K-40-OP	V1-9W-11-BR18-40K-40-CL
V1-9W-11-BR27-65K-20-OP	V1-9W-11-BR27-65K-20-CL
V1-9W-11-BR27-65K-40-OP	V1-9W-11-BR27-65K-40-CL
V1-9W-11-BR22-50K-20-OP	V1-9W-11-BR22-50K-20-CL
V1-9W-11-BR22-50K-40-OP	V1-9W-11-BR22-50K-40-CL

* Trim also available in black matte (Color code 22)



Open Trim (OP)




Closed Trim (CL)

MODEL CODES / TRIMLESS OPTIONS

KITS OPEN TRIMLESS	KITS CLOSED TRIMLESS
V1-9W-11-BR18-40K-20-TL-OP	V1-9W-11-BR18-40K-20-TL-CL
V1-9W-11-BR18-40K-40-TL-OP	V1-9W-11-BR18-40K-40-TL-CL
V1-9W-11-BR27-65K-20-TL-OP	V1-9W-11-BR27-65K-20-TL-CL
V1-9W-11-BR27-65K-40-TL-OP	V1-9W-11-BR27-65K-40-TL-CL
V1-9W-11-BR22-50K-20-TL-OP	V1-9W-11-BR22-50K-20-TL-CL
V1-9W-11-BR22-50K-40-TL-OP	V1-9W-11-BR22-50K-40-TL-C

* Trim also available in black matte (Color code 22)



Open Trimless (OP)



Closed Trimless (CL)

COMPATIBLE TRIM / TRIMLESS

OPEN & CLOSED TRIM OPTIONS




TRIM FINISH





TRIM DIMENSIONS

Open Trim (OP)

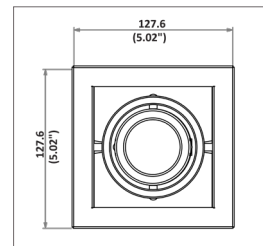

Closed Trim (CL)

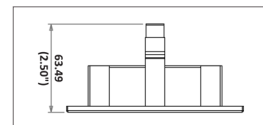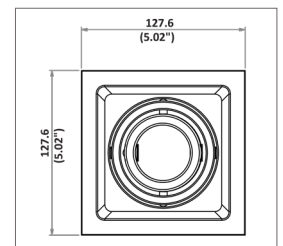

2.50" / 63.49mm

APERTURE

Ø 2" / 50.8mm

TRIM

5.02" x 5.02"
127.6 x 127.6mm

OPTICS





20 Degrees



40 Degrees

OPEN & CLOSED TRIMLESS OPTIONS

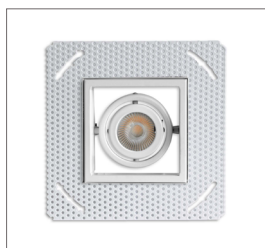


TRIM FINISH




TRIMLESS DIMENSIONS

Open Trimless (TL-OP)

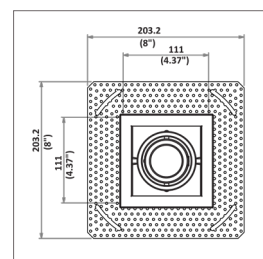

Closed Trimless (TL-CL)

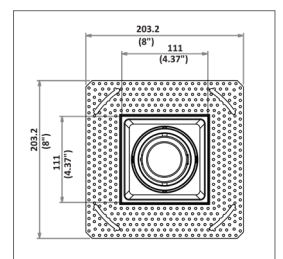

TRIMLESS PLATE

8" x 8"
203.2 x 203.2mm

APERTURE

Ø 2" / 50.8mm

TRIM

5.02" x 5.02"
127.6 x 127.6mm

OPTICS



20 Degrees



40 Degrees



V1-9W-BR-SERIES


HOUSING | V1-9W-HSG

Hanger bars can be adjusted from 8.35" to 23.25", to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for easy installation.

*The die-cast aluminum heat sink is painted black.

Housing	V1-9W-HSG
Ceiling Cut-out	4.5" x 4.5" / 114.3mm x 114.3mm
Ceiling Thickness	1/2" to 1 1/2" / 12.7mm to 38.1mm

OVERALL DIMENSIONS

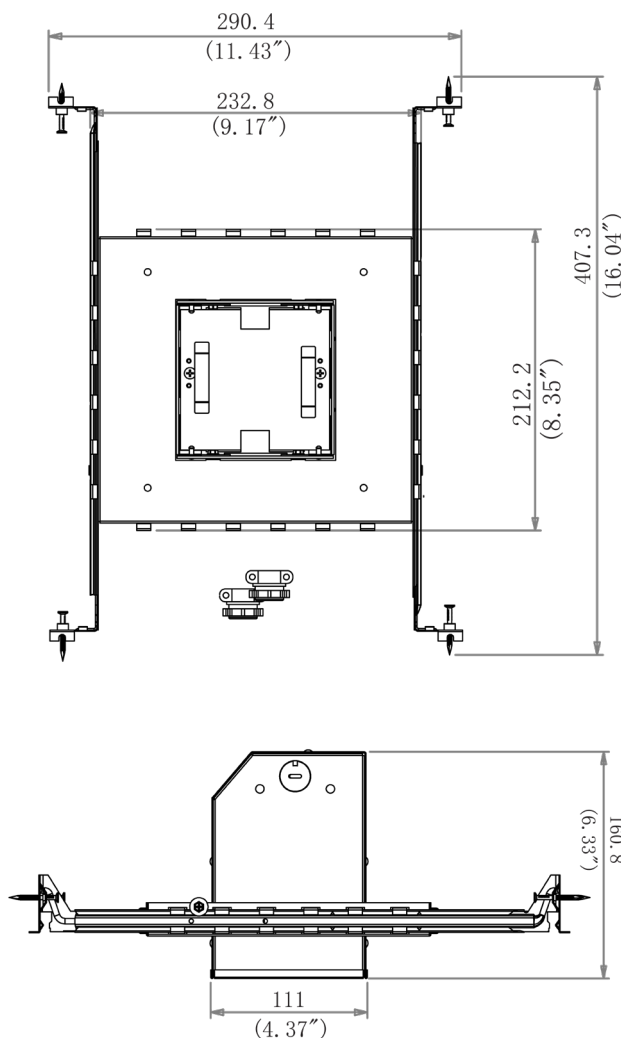

Length:	9.17 Inch / 232.8mm
Height:	8.35 Inch / 212.2mm
Width:	6.33 Inch / 160.8mm
Adjustable Brackets:	Max: 23.5 Inch / 590.55mm Min: 8.35 Inch / 212.09mm

COMPATIBLE DECODER



DMX DECODER
DMX-SR-2112

COMPATIBLE POWER SUPPLY





POWER SUPPLY
PS-SR2112-96


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

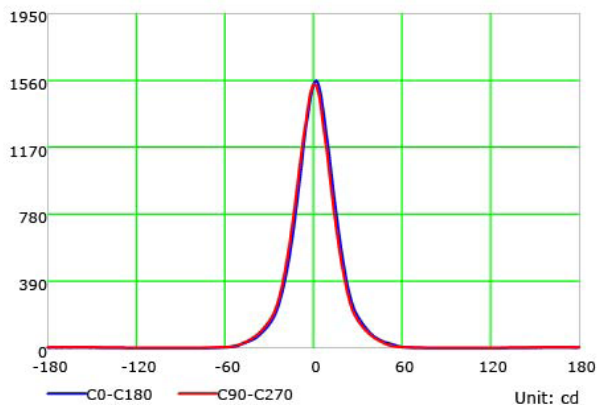
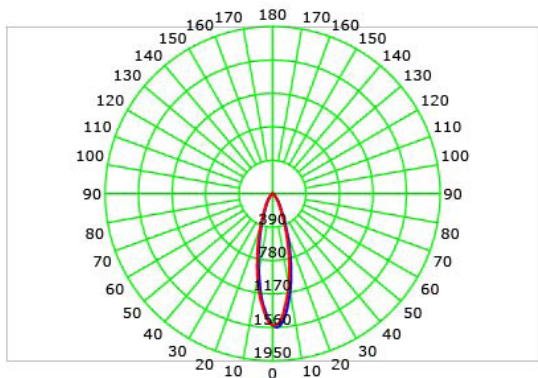


Illuminance at a Distance

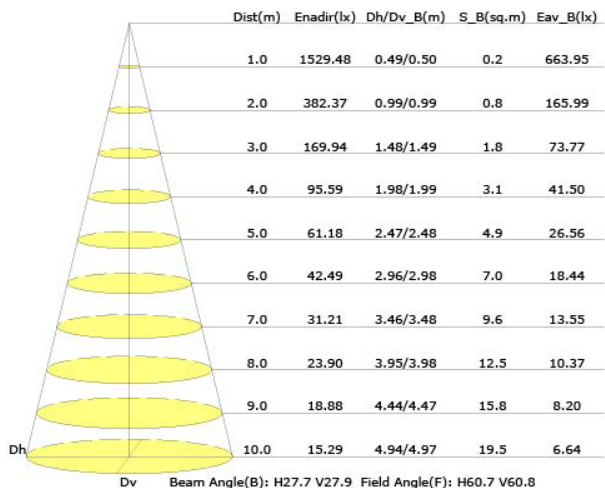


COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

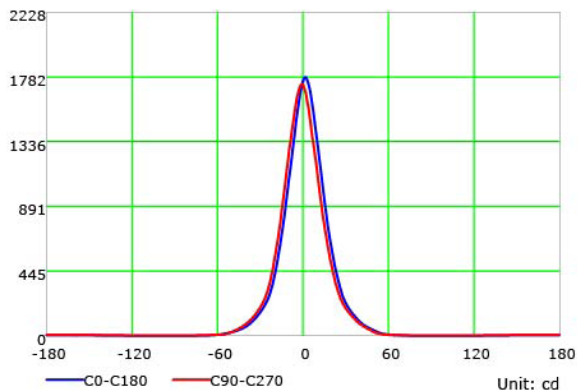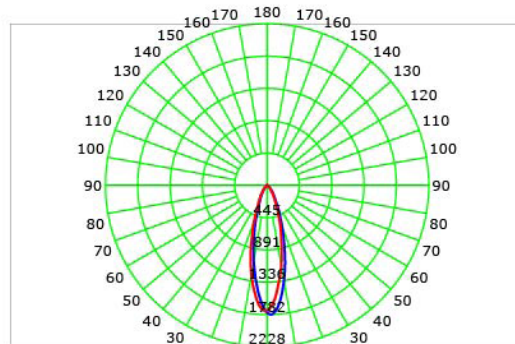



Illuminance at a Distance

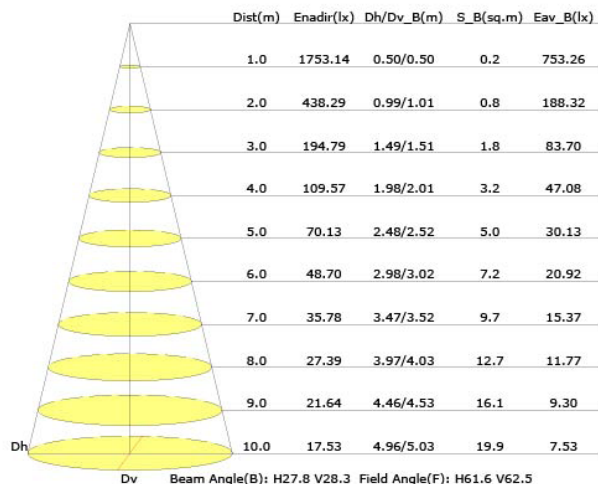


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

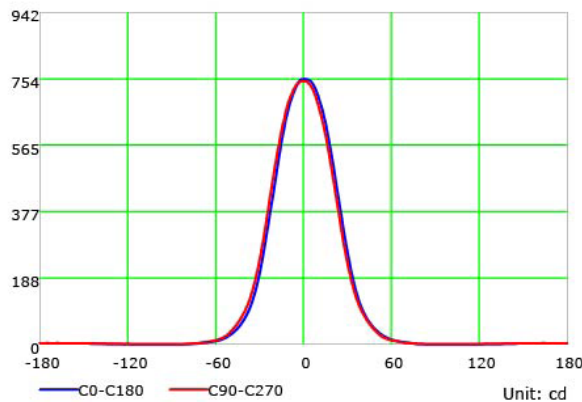
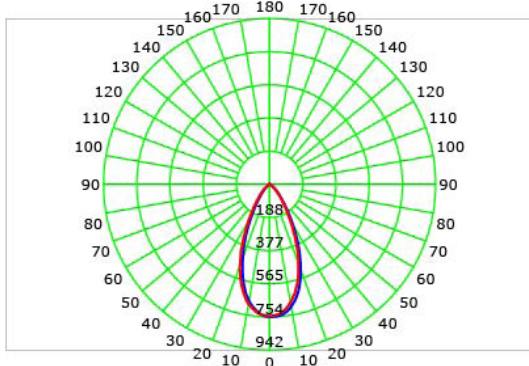


Illuminance at a Distance

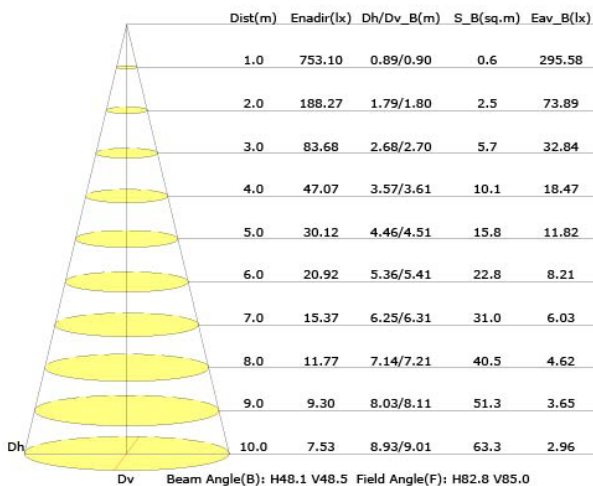

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

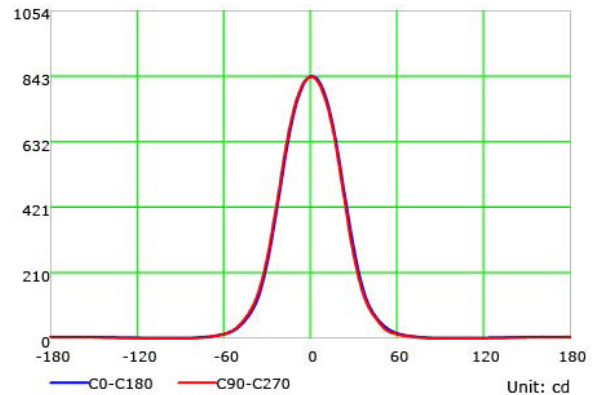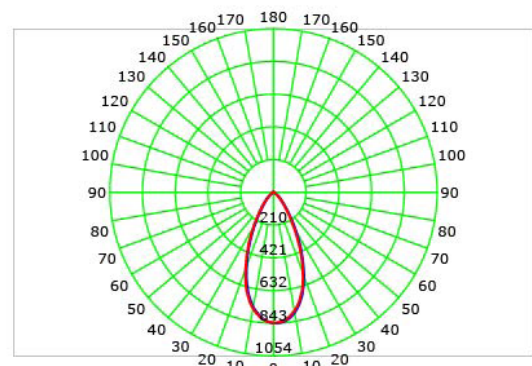

Illuminance at a Distance

