



SPECIFICATION SHEET

BIANCA-16W-BI-RD-PDT

BIANCA SERIES – ADJUSTABLE PENDANT LIGHT



PRODUCT CODES

2 Meters
BIANCA-16W-BI18-40K-B20-PDT-2M
BIANCA-16W-BI18-40K-B40-PDT-2M
BIANCA-16W-BI27-65K-B20-PDT-2M
BIANCA-16W-BI27-65K-B40-PDT-2M

*Adjustable tube also available in 3 meters



FRONT VIEW



ADJUSTABLE TUBE



- DL** Dimmable Lighting
0 to 100% flicker free dimming
- TL** Tunable Lighting
- CRI 95+**
- Working Temperature
-10°C to +40°C
- 5** Year Limited Warranty
- JA8** TITLE 24 COMPLIANT
- UL** US LISTED

SPECIFICATIONS



Wattage	16 Watts (two channels)			
Color Temperature	1800K - 4000K		2700K - 6500K	
Beam Angle	20D	40D	20D	40D
Total Lumens	1200 lm	1250 lm	1300 lm	1400 lm
LED CRI	≥95Ra			
Input Voltage	48 Volts RJ45			
LED	COB			
LM Rating	LM-80			
Bulb Dimension	Ø 4" / Ø 101.6mm			
Adjustable Tube	2 Meters & 3 Meters			
Certifications	cULus E476753, JA8 Title 24			
Compatible Decoder	DMX-SR-2112 Decoder			
Power Supply	PS-SR2112-96 - Power Supply 96W			
Working Temperature	-10C to 40C			
IP Grade	IP20 Standard			
Life Span	50,000 Hours			
Warranty	5 Year Limited Warranty			

www.colorbeamlighting.com


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

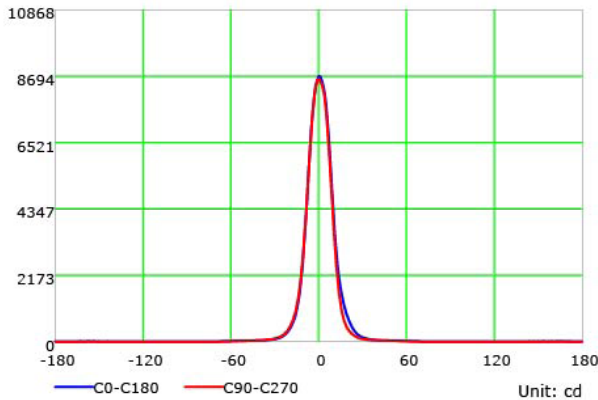
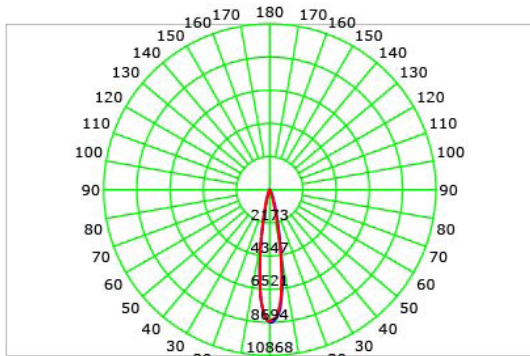


Illuminance at a Distance

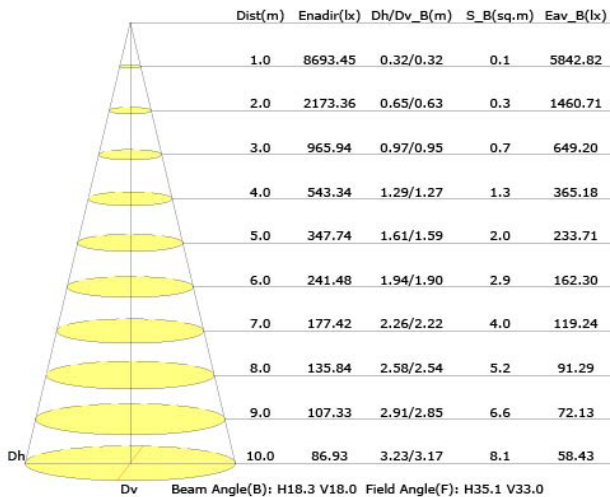


COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

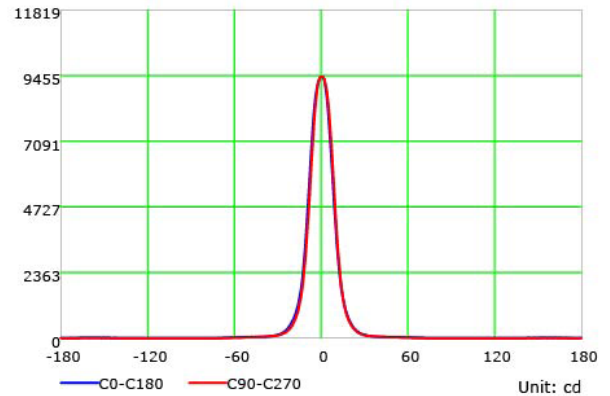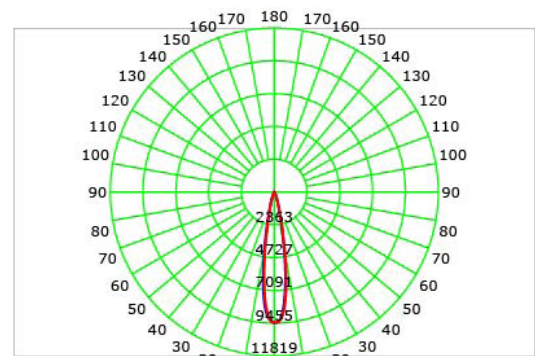



Illuminance at a Distance

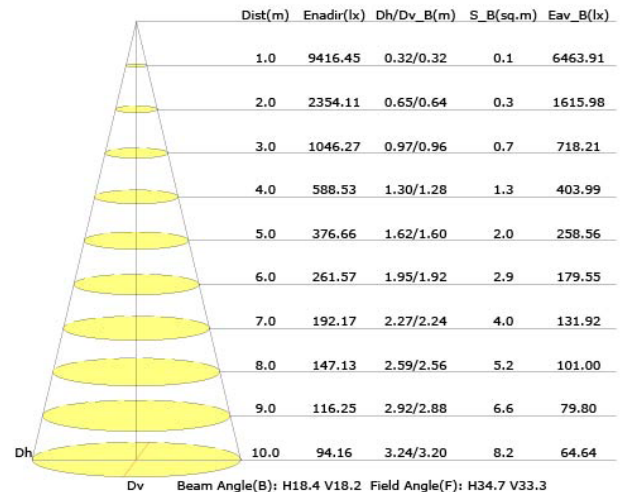


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

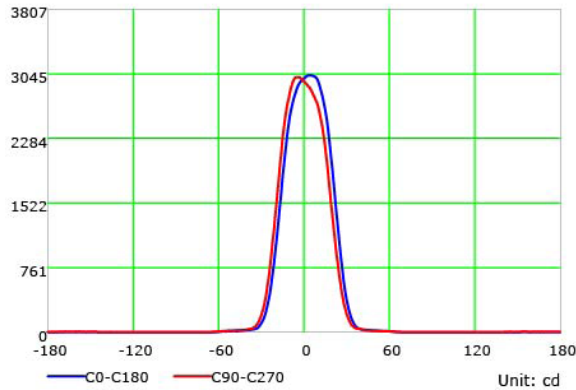
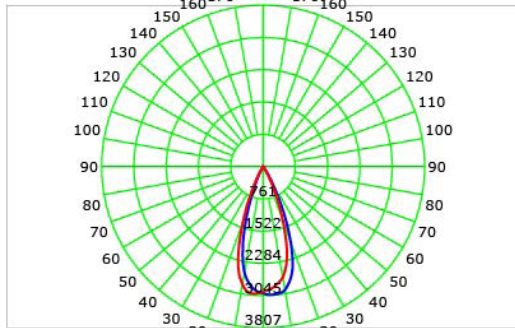


Illuminance at a Distance

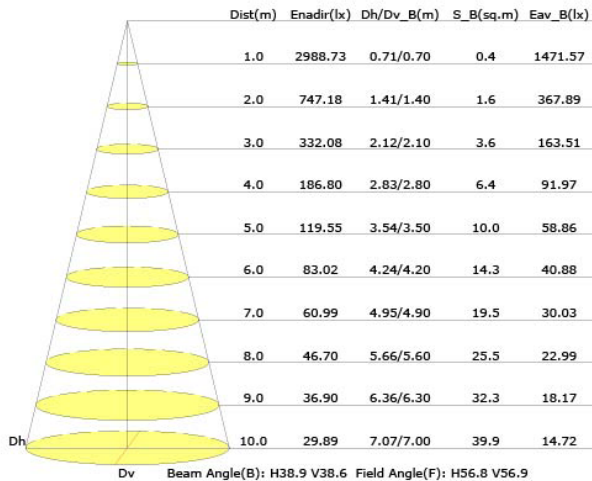

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

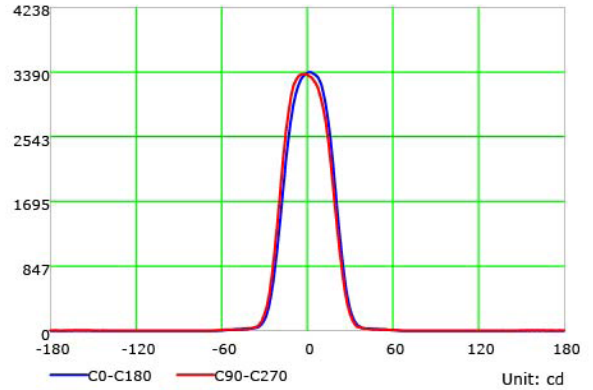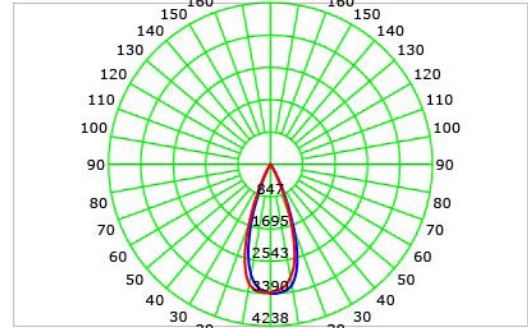

Illuminance at a Distance

