



SPECIFICATION SHEET

SKYLIGHT 2X2

INTRODUCTION

Imagine sunlight anywhere, anytime, and on demand. That's the revolutionary Colorbeam digital skylight. Sunlight plays a vital role in our well-being, mood, and productivity and Colorbeam now delivers a breakthrough solution.



FRAME ON

DSK-2x2-BI25-10K-CL-FO

DSK-2x2-BI25-10K-CD-FO



FRAME IN


DSK-2x2-BI25-10K-CL-FI

DSK-2x2-BI25-10K-CD-FI



TECHNICAL SPECS

ITEMS	TYPICAL	MINIMUM	MAXIMUM
Size	23.42" x 23.42" x 3.34"		
Power		10W	260W
Voltage	230V	100V	264V
Current		0.1A	3A
Mains frequency	50/60Hz		
Power Factor	0.95	0.93	0.98
Dimmable Range		1%	100%
Luminous Flux		50Lm	7300Lm
Luminous Intensity		17cd	145000cd
CCT	5600K	2500K	10000K
Ra	95	93	98
Working Temperature	25°C	-25°C	45°C
Life Time	50,000Hr		
Certification	CE/CCC		

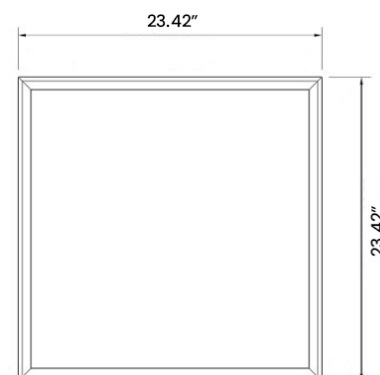

www.colorbeamlighting.com



SPECIFICATION SHEET

SKYLIGHT 2X2

TYPICAL APPLICATIONS



- RESIDENTIAL
- OFFICES
- EDUCATIONAL FACILITIES
- MEDICAL BUILDINGS
- RETIREMENT HOUSES
- HEALTHCARE
- COMMERCIAL

SKYLIGHT is the first artificial daylight system, which mimics natural light. Colorbeam's Skylight solution integrates the latest LED technology, optical design, and intelligent control system.

SKYLIGHT OFFERS

- ▶ Natural view of high-quality sky simulation
- ▶ Natural daylight effect including skylight and sunshine
- ▶ Skylight and sunlight can synchronize to the real sun in 24 hours



Dimmable Lighting
0 to 100% flicker free dimming



Tunable Lighting



Working
Temperature



5 Year
Warranty

www.colorbeamlighting.com

450 Montée de Liesse
Montréal, QC H4T 1N8

Tél: 844-301-CBNA (2262) Email: info@colorbeamlighting.com

Colorbeam Lighting Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.