




SPECIFICATION SHEET
TRACK-OP-038-TL
TRIMLESS

FEATURES

- Material: anodized aluminum 6063
- Lighting source width: Max 31mm
- Installation: Trimless recessed in drywall
- Profile length: 1 meter and 2 meters
- Cover material: PMMA, PC
- Opal cover

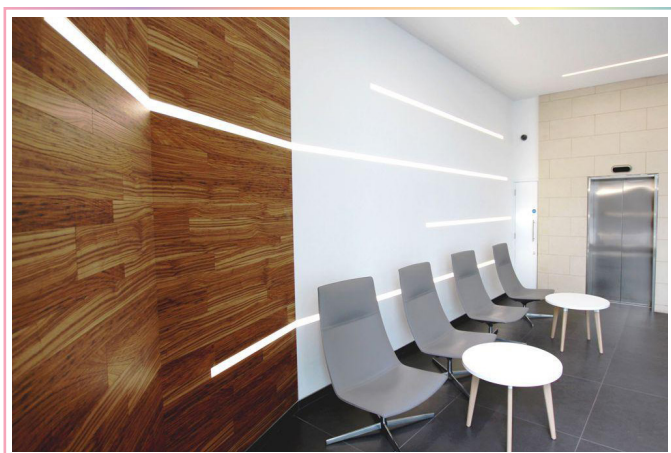


LED LINEAR TRIMLESS TRACKS

TRACK-OP-038-1M-TL
 TRACK-OP-038-2M-TL




ACCESSORIES

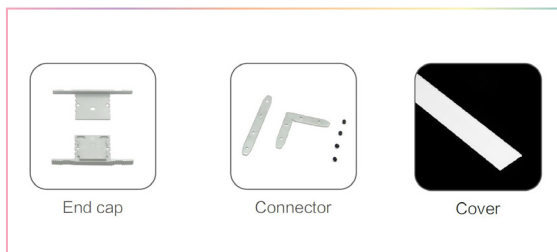

PRODUCT CODES & COMPATIBLE ACCESSORIES

| MODEL | DESCRIPTION |
|---------------------------|--|
| 1 Meter | |
| TRACK-OP-038-1M-TL | Trimless Aluminum Profile with Opal Diffuser Cover (OP-038) - 1M |
| 2 Meters | |
| TRACK-OP-038-2M-TL | Trimless Aluminum Profile with Opal Diffuser Cover (OP-038) - 2M |
| Accessories | |
| TR-ENDCAPS-038 | End Caps 038 (2 Pack) |
| TR-CNR-038-I | Trimless Connector 038, Direct (2 Pack) |
| TR-CNR-038-L | Trimless Connector 038, 90D (2 Pack) |
| TR-CNR-038-V | Trimless Connector 038, Vertical, 90D (2 Pack) |


TRACK DIMENSIONS

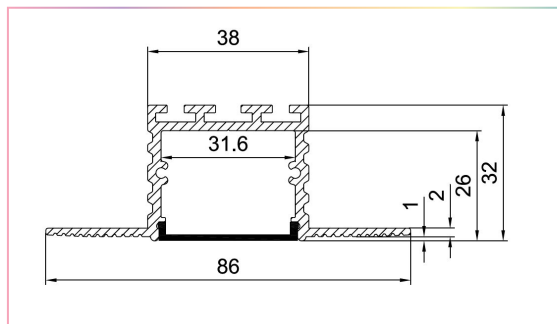



SPECIFICATION SHEET
TRACK-OP-038-TL
TRIMLESS

INSTALLATION VIEW

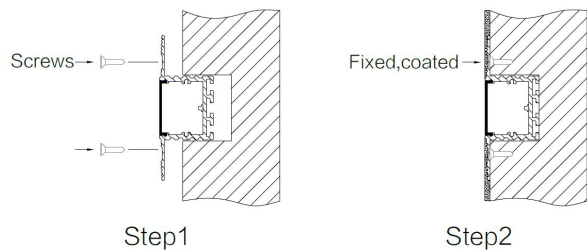

TYPICAL APPLICATIONS

- Vertical and horizontal ceiling applications

ADVANTAGES

- Specifically designed as mounted light bars
- Aluminum material can achieve a better cooling effect

COMPATIBLE LED TAPES

TAPE-60-W



TAPE-120-W

TAPE-120-W27K



TAPE-120-BI

TAPE-120-BI TAPE-120-BI-IP68



TAPE-30/60/240-RGB

TAPE-30-RGB
 TAPE-30-RGB-IP68



TAPE-60-RGB
 TAPE-60-RGB-IP68



TAPE-240-RGB



TAPE-60-RGBW

TAPE-60-RGB27K
 TAPE-60-RGB27K-IP68



TAPE-60-RGB30K
 TAPE-60-RGB30K-IP68



TAPE-60-RGB33K
 TAPE-60-RGB33K-IP68



TAPE-60-RGB50K
 TAPE-60-RGB50K-IP68

