




PALMA SERIES – INDOOR & OUTDOOR

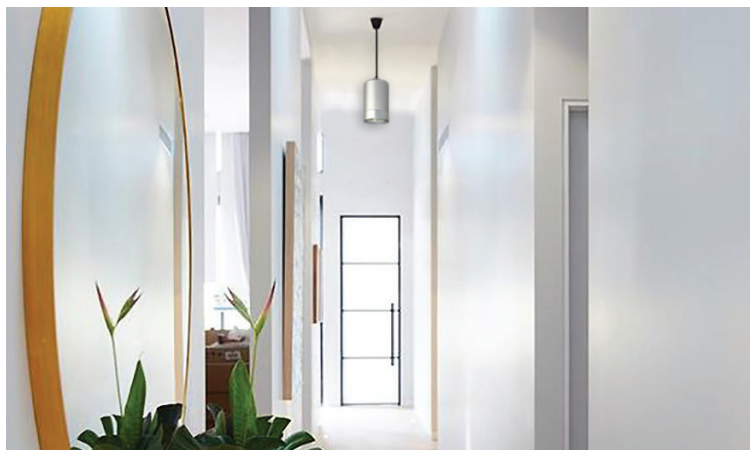

1800K to 4000K

2200K to 5000K

2700K to 6500K

SPECIFICATIONS

Wattage	9 Watts
Lumens Range	320Lm - 380 Lm
Beam Angle	20° and 40°
LED CRI	≥95Ra
Input Voltage	48 Volts, RJ45
LED Type	CTM-9 /Luminus
Housing material	Aluminum
Dimensions	Ø59*H108.85 mm
Certifications	cULus
Compatible Decoder	DMX-SR-2112 Decoder
Power Supply	PS-SR2112-96 - Power Supply 96W
Working Temperature	-25C to 40C
IP Grade	IP67
Lifespan	50,000 Hours
Warranty	3 Year Limited Warranty


PRODUCT CODES	
PALMA-9W-BR-18-40K-20-AL	PALMA-9W-BR-27-65K-20-SS
PALMA-9W-BR-18-40K-20-B	PALMA-9W-BR-22-50K-20-AL
PALMA-9W-BR-18-40K-20-SS	PALMA-9W-BR-22-50K-20-B
PALMA-9W-BR-27-65K-20-AL	PALMA-9W-BR-22-50K-20-SS
PALMA-9W-BR-27-65K-20-B	

* Also available in 40 degrees

FRONT VIEW




DIMENSIONS

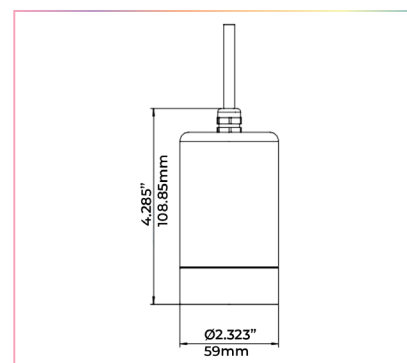


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

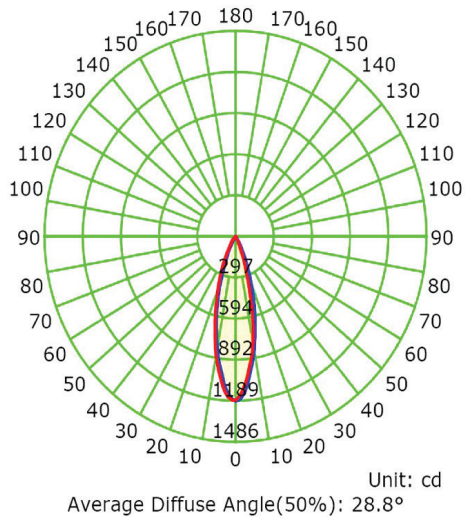


Illuminance at a Distance

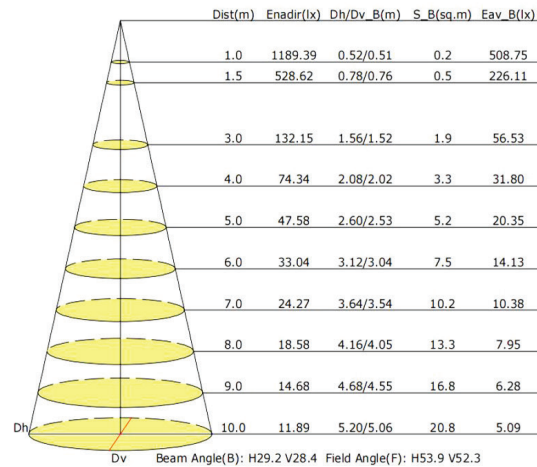


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

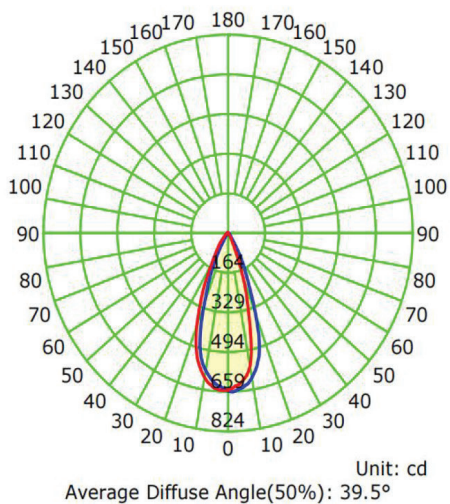


Illuminance at a Distance

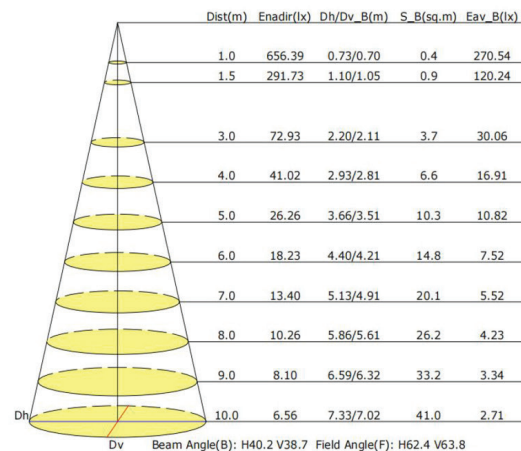


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

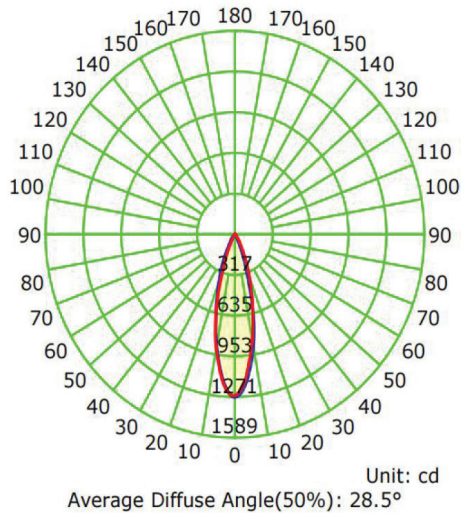


Illuminance at a Distance

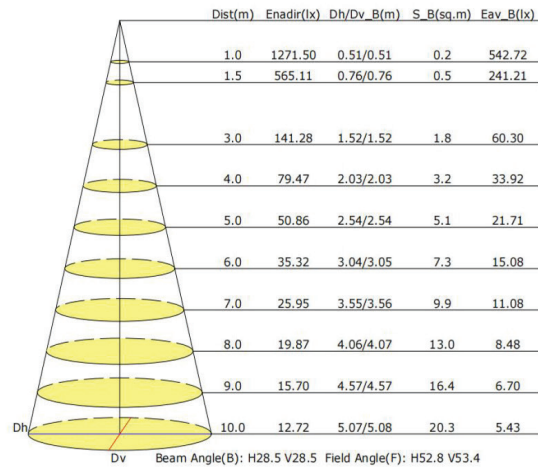

PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

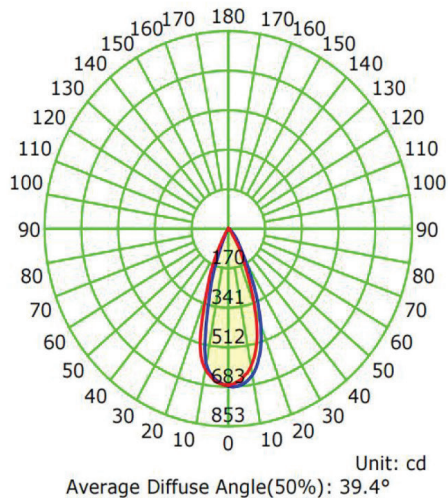

Illuminance at a Distance

