

T-BR 9W SERIES - Adjustable & Fixed Trims

These sleek and stylish luminaires include the 9W tunable, 95+ CRI, 650 lumen light engine. The T-BR Series delivers performance and beautiful aesthetics. Available in both adjustable and fixed trim options.



ROUND TRIM OPTIONS



SQUARE TRIM OPTIONS




SPECIFICATIONS

Wattage	9 Watts			
Color Temperature	1800K - 4000K		2700K - 6500K	
Beam Angle	20D	40D	20D	40D
Total Lumens	550 lm		650 lm	
LED CRI	≥95Ra			
Input Voltage	48 Volts, RJ45			
LED	COB			
LM Rating	LM-80			
Bulb Dimensions	Ø 1.96" x 3.20" / Ø 50mm x 81.50mm			
Ceiling Cut-out	Ø 3.54" / Ø 90mm			
Certifications	cULus E476753, JA8 Title 24			
Compatible Decoder	DMX-SR-2112 Decoder			
Power Supply	PS-SR2112-96 - Power Supply 96W			
Working Temperature	-10C to 40C			
IP Grade	IP20 Standard			
Lifespan	50,000 Hours			
Warranty	5 Year Limited Warranty			

9W BR BULB



BULB DIMENSIONS

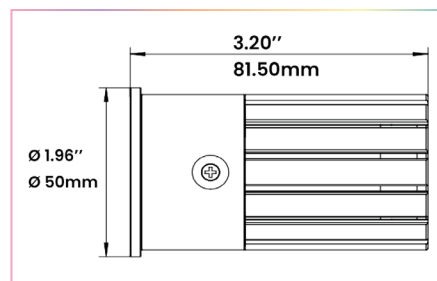



SPECIFICATION SHEET T BR-9W SERIES


T BR SERIES - ROUND TRIMS

T-100-11-9W-BR / Round Shower Trim



TRIM FINISH

 Matte White (11)



KITS MODEL CODES

T-100-11-9W-BR27-65K-W40

T-100-11-9W-BR18-40K-W40

OPTICS



20 Degrees




40 Degrees

APERTURE

Ø 2.63" / 67mm

TRIM

Ø 4.45" / 113mm




T-150-11-9W-BR | T-150-22-9W-BR / Round Adjustable Trim



TRIM FINISH

 Matte White (11)

 Matte Black (22)



KITS MODEL CODES

T-150-11-9W-BR27-65K-W20

T-150-11-9W-BR18-40K-W20

T-150-22-9W-BR27-65K-B20

T-150-22-9W-BR18-40K-B20

* Bulb also available in 40 degrees

OPTICS



20 Degrees




40 Degrees

APERTURE

Ø 2" / 50.8mm

TRIM

Ø 4.45" / 113mm




T-200-11-9W-BR | T-200-22-9W-BR / Round Adjustable Trim



TRIM / REFLECTOR FINISH

 Matte White (11)

 Matte Black (22)



KITS MODEL CODES

T-200-11-9W-BR27-65K-W20

T-200-11-9W-BR18-40K-W20

T-200-22-9W-BR27-65K-B20

T-200-22-9W-BR18-40K-B20

* Bulb also available in 40 degrees

OPTICS



20 Degrees




40 Degrees

APERTURE

Ø 2" / 50.8mm

TRIM

Ø 4.45" / 113mm




www.colorbeamlighting.com

T BR SERIES – SQUARE TRIMS

T-650-11-9W-BR | T-650-22-9W-BR / Square Adjustable Trim




TRIM / REFLECTOR FINISH



KITS MODEL CODES
T-650-11-9W-BR27-65K-W20
T-650-11-9W-BR18-40K-W20
T-650-22-9W-BR27-65K-W20
T-650-22-9W-BR18-40K-W20

* Bulb also available in 40 degrees

OPTICS




APERTURE

Ø 2" / 50.8mm

TRIM


4.27X4.27" / 108.45X 108.45mm



T-700-11MG-9W-BR / Square Fixed Trim




TRIM / REFLECTOR FINISH



KITS MODEL CODES
T-700-11MG-9W-BR27-65K-W40
T-700-11MG-9W-BR18-40K-W40

OPTICS




APERTURE

Ø 2" / 50.8mm

TRIM

4.27X4.27" / 108.45X 108.45mm




PRE-CONSTRUCTION PLATE & AIR TIGHT CAN


Designed for direct contact with insulation. Can be installed in 1/2" to 1 1/2" thick ceilings. Includes adjustable hanger bars

Pre-Construction Plate	T-NCMP
Housing	T-H-9-CAN
Ceiling Cut-out	Ø 3.54" / Ø 90mm
Ceiling Thickness	1/2" / 12.7mm to 1 1/2" / 38.1mm

PRE-CONSTRUCTION PLATE | T-NCMP

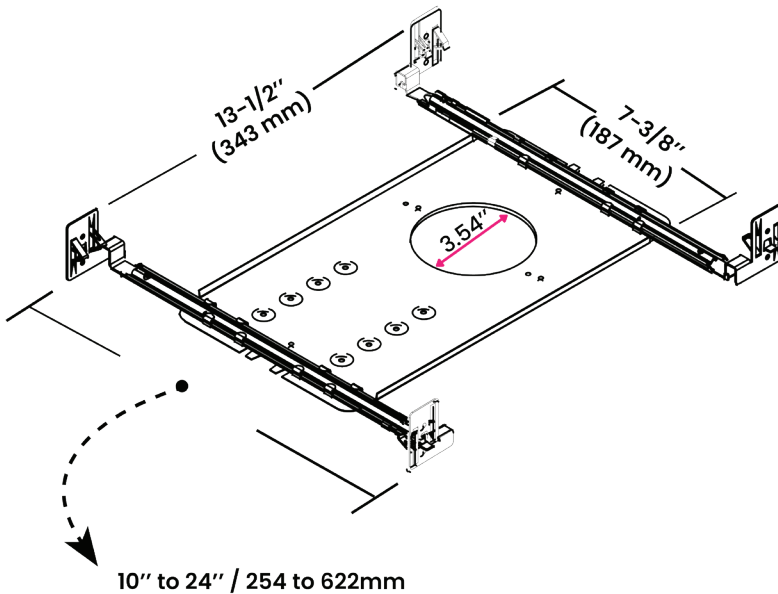

HOUSING | T-H-9-CAN

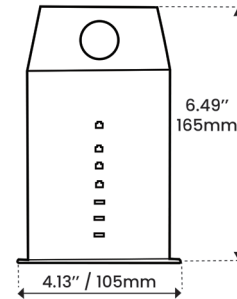

Pre-Construction Plate | T-NCMP

Length:	13.5 Inch / 343mm
Height:	7.75 Inch / 187mm
Adjustable Brackets:	Max: 24 Inch / 622mm Min: 10 Inch / 254mm

COMPATIBLE DECODER



DMX DECODER
DMX-SR-2112

COMPATIBLE POWER SUPPLY



POWER SUPPLY
PS-SR2112-96





SPECIFICATION SHEET T BR-9W SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

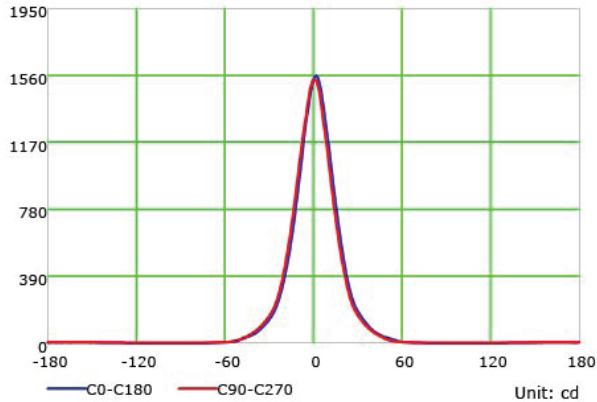
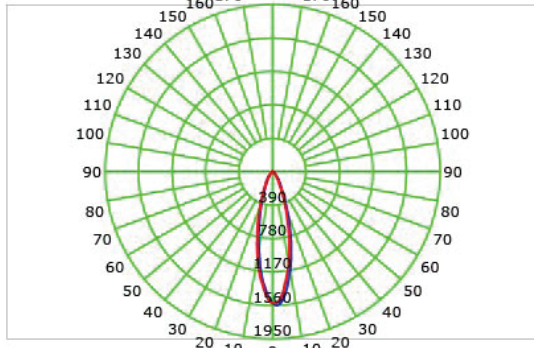


Illuminance at a Distance

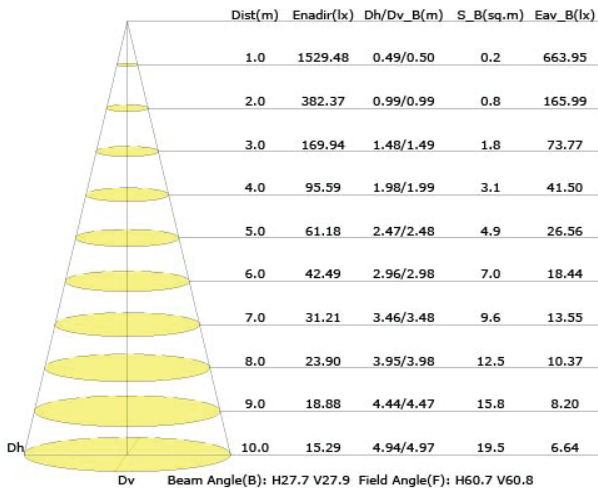


COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

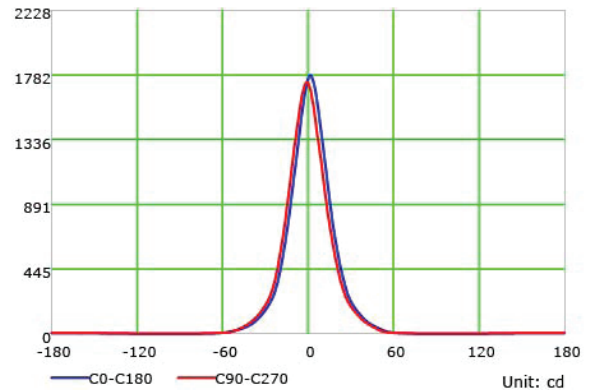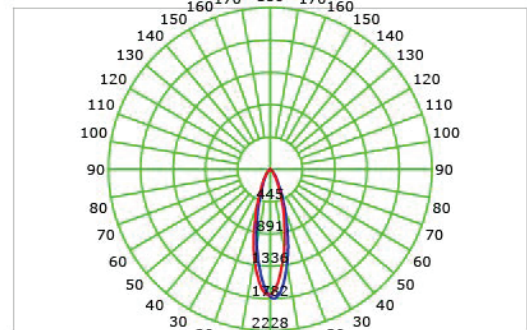



Illuminance at a Distance

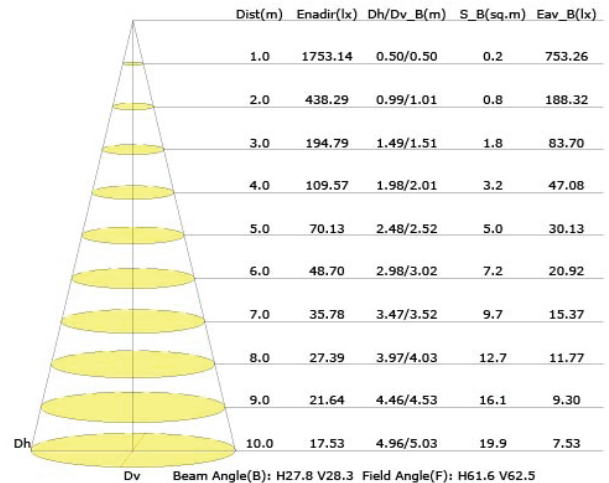


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

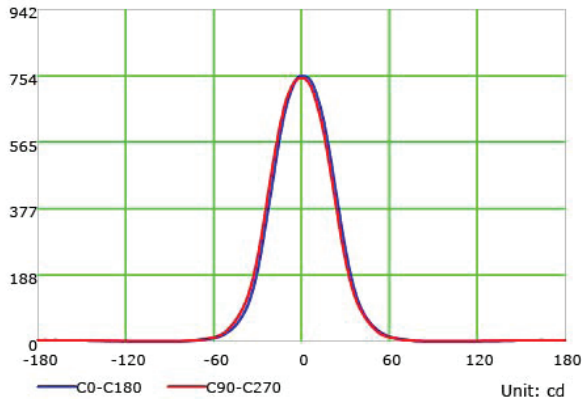
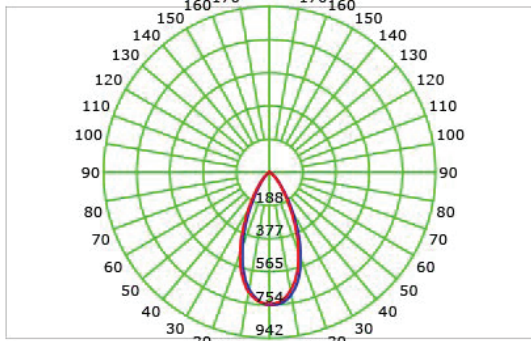


ILLUMINANCE AT A DISTANCE

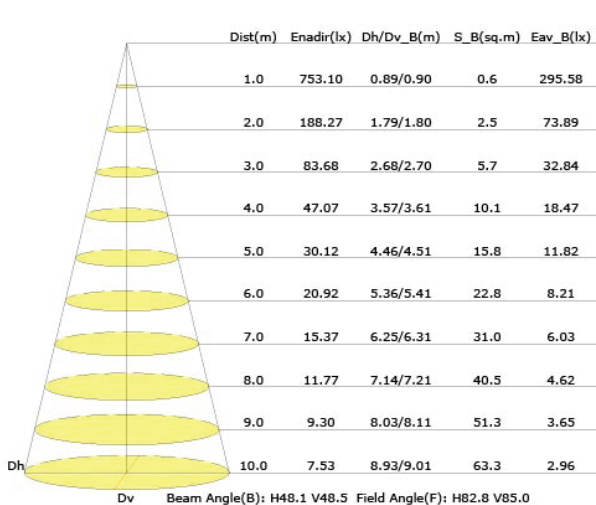

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

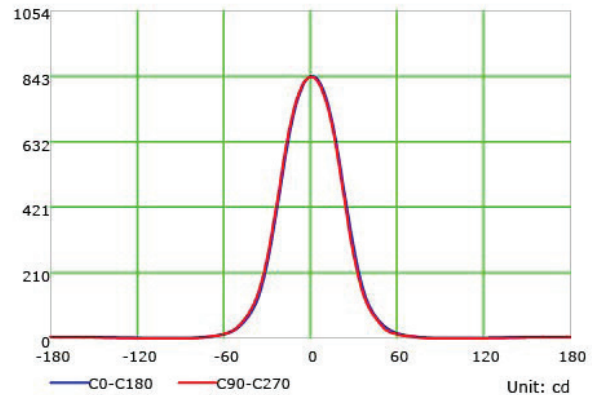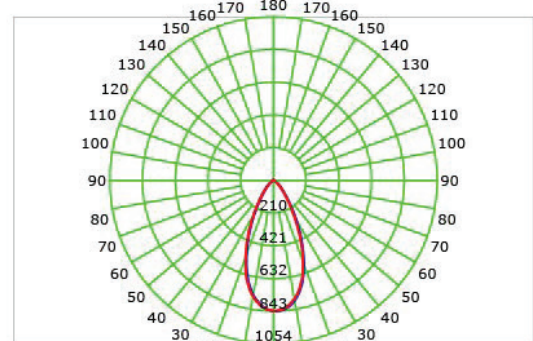

ILLUMINANCE AT A DISTANCE

