



SPECIFICATION SHEET

SKYLIGHT 2X2

INTRODUCTION

Imagine sunlight anywhere, anytime, and on demand. That's the revolutionary Colorbeam digital skylight. Sunlight plays a vital role in our well-being, mood and productivity and Colorbeam now delivers a breakthrough solution.

Skylight, controlled by a built-in dmx decoder with its own power supply, operates by itself without Colorbeam's software.



FRAME ON

DSK-2x2-BI25-10K-CL-FO

DSK-2x2-BI25-10K-CD-FO



FRAME IN


DSK-2x2-BI25-10K-CL-FI

DSK-2x2-BI25-10K-CD-FI



SPECIFICATIONS

ITEMS	TYPICAL	MINIMUM	MAXIMUM
Dimensions	22.44*22.44*2.87" / 570*570*73mm		
Power	90W	88W	98W
Voltage	120V	100V	277V
Current		0.1A	3A
Mains frequency	50/60Hz		
Power Factor	0.95	0.4	1.2
Dimmable Range		1%	100%
Luminous Flux		50Lm	7300Lm
Luminous Intensity		17cd	145000cd
CCT		2500K	10000K
Ra	95	93	98
Life Time	50,000Hr		
Certification	UL/CUL		

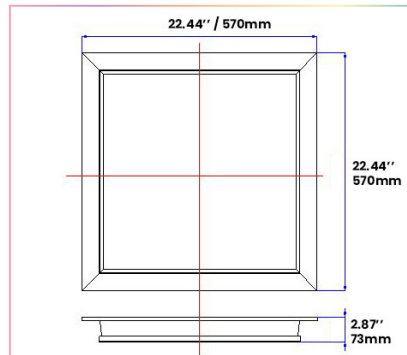

www.colorbeamlighting.com



SPECIFICATION SHEET

SKYLIGHT 2X2

TYPICAL APPLICATIONS



- RESIDENTIAL
- OFFICES
- EDUCATIONAL FACILITIES
- MEDICAL BUILDINGS
- RETIREMENT HOUSES
- HEALTHCARE
- COMMERCIAL

SKYLIGHT is the first artificial daylight system, which mimics natural light. Colorbeam's Skylight solution integrates the latest LED technology, optical design, and intelligent control system.

SKYLIGHT OFFERS

- ▶ Natural view of high-quality sky simulation
- ▶ Natural daylight effect including skylight and sunshine
- ▶ Skylight and sunlight can synchronize to the real sun in 24 hours



Dimmable Lighting
0 to 100% flicker free dimming



Tunable Lighting



Working Temperature



5 Year Warranty



www.colorbeamlighting.com