



SPECIFICATION SHEET
SKYLIGHT 2X4

INTRODUCTION

Imagine sunlight anywhere, anytime, and on demand. That's the revolutionary Colorbeam digital skylight. Sunlight plays a vital role in our well-being, mood and productivity and Colorbeam now delivers a breakthrough solution. Skylight, controlled by a built-in dmx decoder with its own power supply, operates by itself without Colorbeam's software.



FRAME ON

DSK-2x4-BI25-10K-CL-FO
 DSK-2x4-BI25-10K-CD-FO




FRAME IN

DSK-2x4-BI25-10K-CL-FI
 DSK-2x4-BI25-10K-CD-FI



SPECIFICATIONS

ITEMS	TYPICAL	MINIMUM	MAXIMUM
Dimensions	46.06*22.44*2.87" / 1170*570*73mm		
Weight	16 Kg.		
Power	160W	150W	165W
Voltage	120V	100V	277V
Current	1.4A	0.6A	1.6A
Luminous Flux (3mt.)	3500Lm	3000Lm	4000Lm
Luminous Intensity		17cd	145000cd
CCT		2500K	10000K
Ra	95	93	98
Working Temperature	25°C	-25°C	45°C
Life Time	50,000Hr		
Certification	UL/CUL		

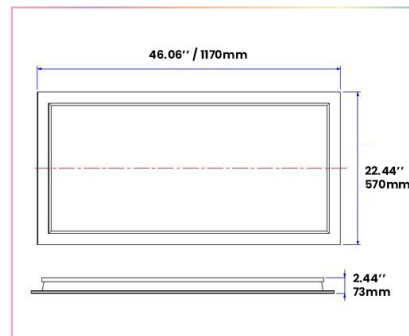

www.colorbeamlighting.com

TYPICAL APPLICATIONS



- RESIDENTIAL
- OFFICES
- EDUCATIONAL FACILITIES
- MEDICAL BUILDINGS
- RETIREMENT HOUSES
- HEALTHCARE
- COMMERCIAL

SKYLIGHT is the first artificial daylight system, which mimics natural light. Colorbeam's Skylight solution integrates the latest LED technology, optical design, and intelligent control system.

SKYLIGHT OFFERS

- ▶ Natural view of high-quality sky simulation
- ▶ Natural daylight effect including skylight and sunshine
- ▶ Skylight and sunlight can synchronize to the real sun in 24 hours



DL Dimmable Lighting
 0 to 100% flicker free dimming



TL Tunable Lighting



Working
 Temperature



5 Year
 Warranty

