



SPECIFICATION SHEET

TEGA-IN-14W/10W-SERIES

TEGA-IN-SERIES - ACCENT LIGHTING



Dimmable Lighting
0 to 100% flicker-free dimming



Tunable Lighting



RGBW Lighting



Working Temperature



3 Year Limited
Warranty



1800K to 4000K

2200K to 5000K

2700K to 6500K

RGBW

SPECIFICATIONS

Wattage	14 Watts	10 Watts
Lumens Range	690Lm - 980 Lm	420 Lm
Beam Angle	20° and 40°	
LED CRI	≥95Ra	
Input Voltage	48 Volts, RJ45	
LED Type	CTM-9 /Luminus	
Housing material	Aluminum	
Dimensions	Ø110*H123 mm	
Certifications	cULus	
Compatible Decoder	DMX-SR2112	
Power Supply	PS-SR2112-96	
Working Temperature	-25C to 40C	
IP Grade	IP67	
Lifespan	50,000 Hours	
Warranty	3 Year Limited Warranty	


PRODUCT CODES

TEGA-IN-14W-BI-18-40K-20	TEGA-IN-14W-BI-18-40K-40
TEGA-IN-14W-BI-27-65K-20	TEGA-IN-14W-BI-27-65K-40
TEGA-IN-14W-BI-22-50K-20	TEGA-IN-14W-BI-22-50K-40
TEGA-IN-10W-RGBW-20	TEGA-IN-10W-RGBW-40

FRONT VIEW



DIMENSIONS

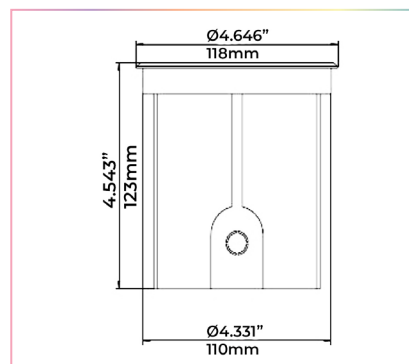

www.colorbeamlighting.com




SPECIFICATION SHEET

TEGA-IN-14W/10W-SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

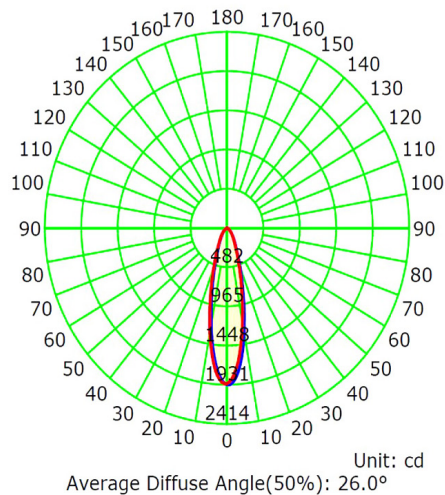


Illuminance at a Distance

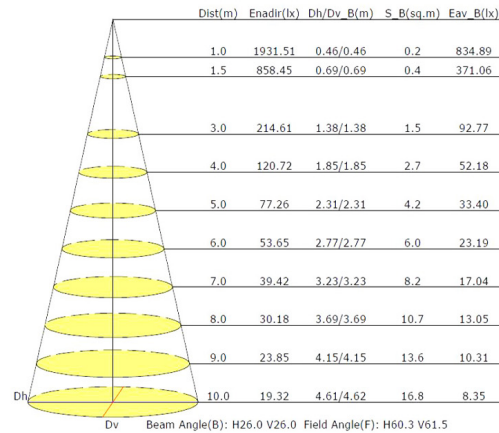


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

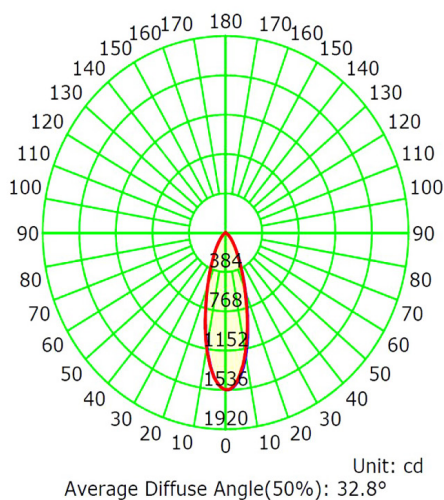

Illuminance at a Distance

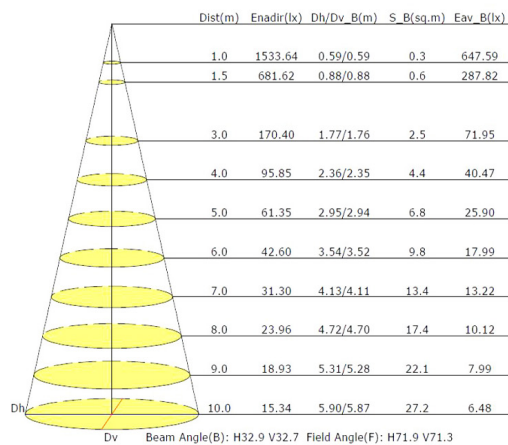




SPECIFICATION SHEET

TEGA-IN-14W/10W-SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

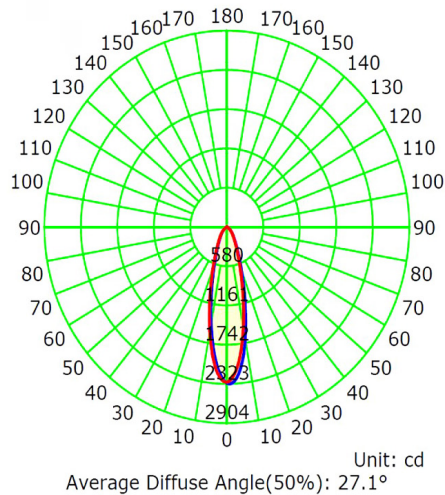


Illuminance at a Distance

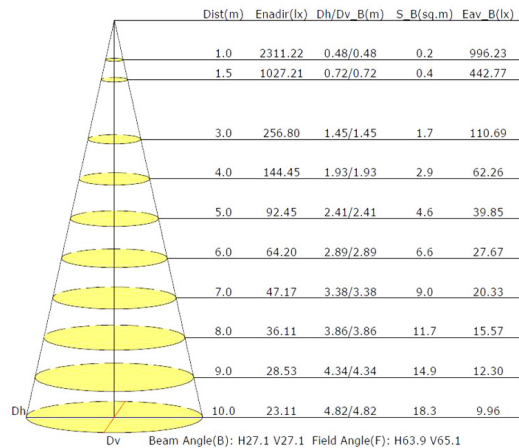


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

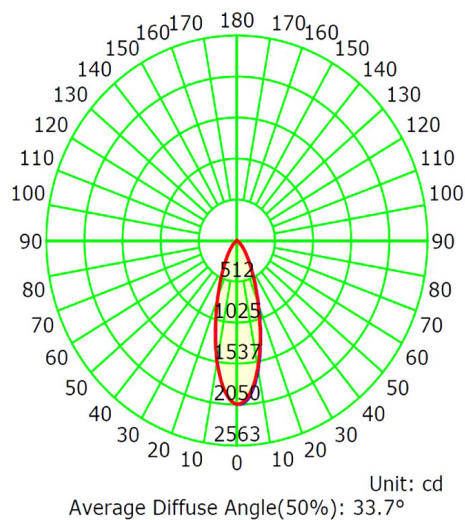

Illuminance at a Distance

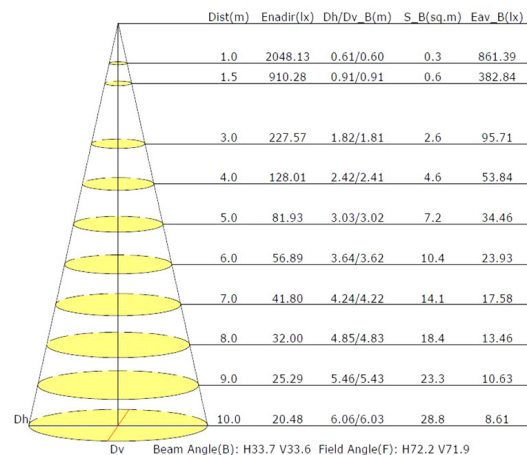




SPECIFICATION SHEET

TEGA-IN-14W/10W-SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / RGBW

Luminous Intensity Distribution Curve

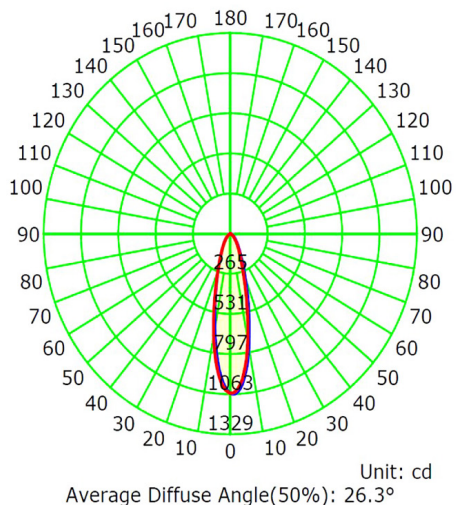


Illuminance at a Distance

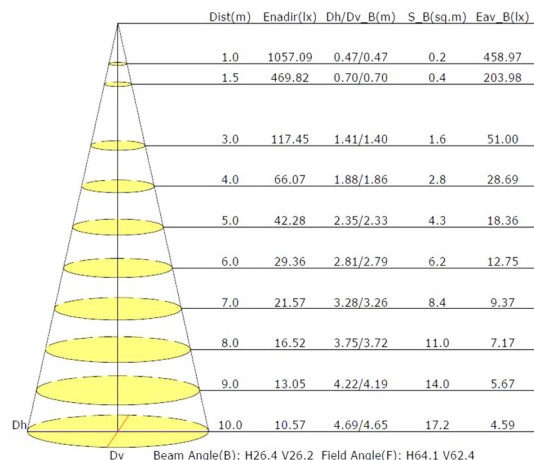

PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / RGBW

Luminous Intensity Distribution Curve

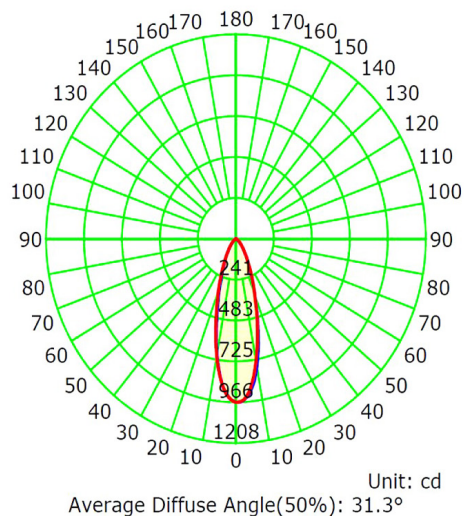

Illuminance at a Distance

