



SPECIFICATION SHEET BALZO V1 SERIES

BALZO SERIES – SPOTLIGHT



DL Dimmable Lighting
0 to 100% flicker-free dimming



TL Tunable Lighting



RGBW RGBW Lighting



Working Temperature



3 Year Limited
Warranty



1800K to 4000K

2200K to 5000K

2700K to 6500K

RGBW


SPECIFICATIONS

Wattage	9 Watts	10 Watts
Lumens Range	360 - 400 Lm	250 Lm
Beam Angle	20° and 40°	40°
LED CRI	≥95Ra	
Input Voltage	48 Volts, RJ45	
LED Type	CTM-9 /Luminus	
Housing material	Aluminum	
Dimensions	Ø59*H198.77mm	
Certifications	cULus	
Compatible De-coder	DMX-SR-2112 Decoder	
Power Supply	PS-SR2112-96 - Power Supply 96W	
Working Temperature	-25C to 40C	
IP Grade	IP68	
Lifespan	50,000 Hours	
Warranty	3 Year Limited Warranty	

FRONT VIEW



DIMENSIONS

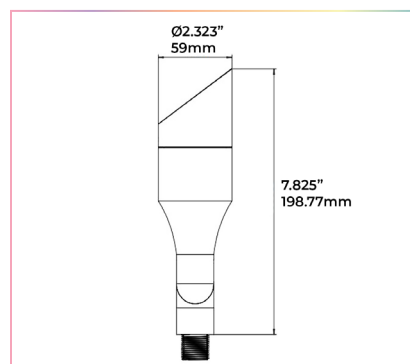

www.colorbeamlighting.com




SPECIFICATION SHEET BALZO VI SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

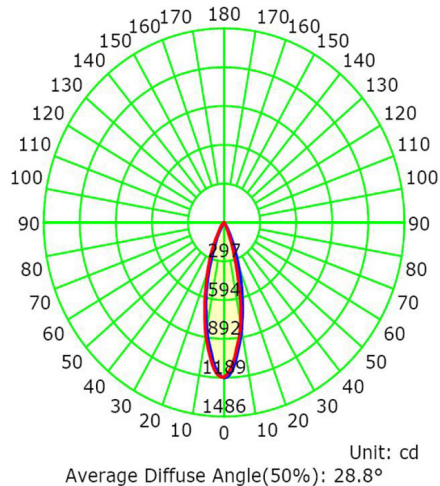


Illuminance at a Distance

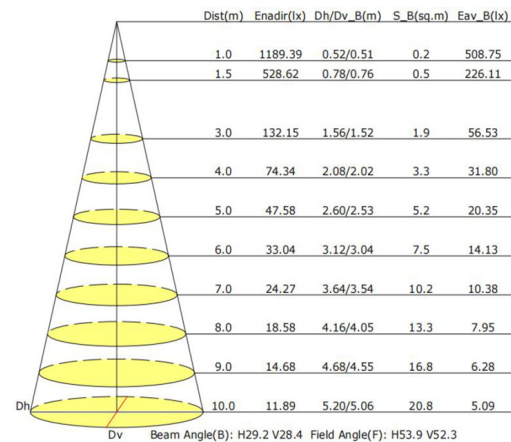


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 1800K - 4000K

Luminous Intensity Distribution Curve

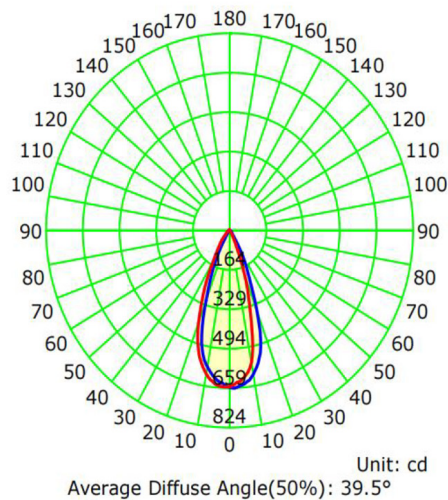

Illuminance at a Distance

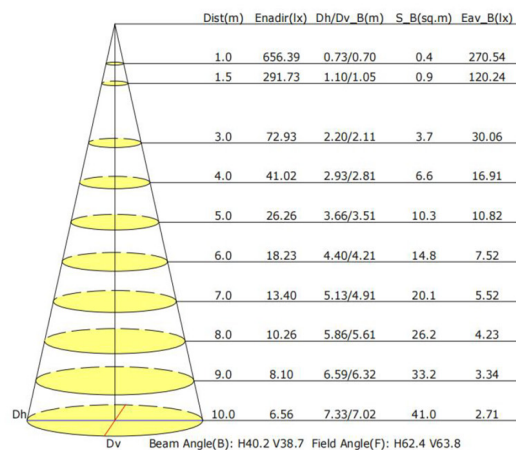




SPECIFICATION SHEET BALZO VI SERIES


PHOTOMETRIC INFORMATION / 20D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

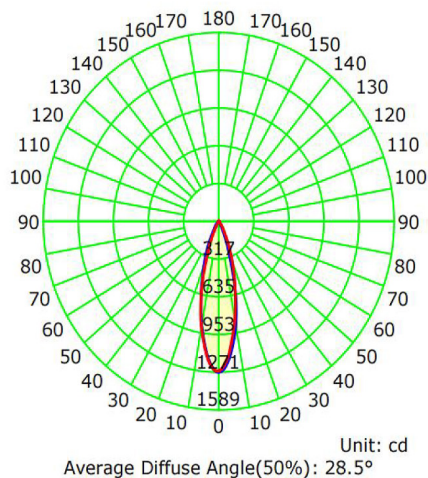


Illuminance at a Distance

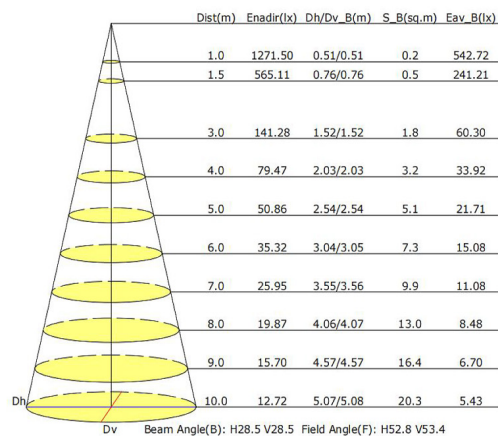


PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / 2700K - 6500K

Luminous Intensity Distribution Curve

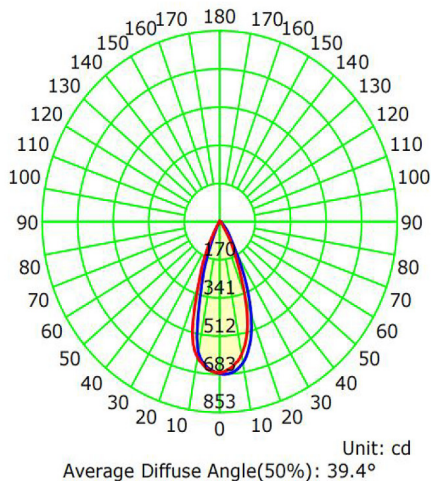

Illuminance at a Distance

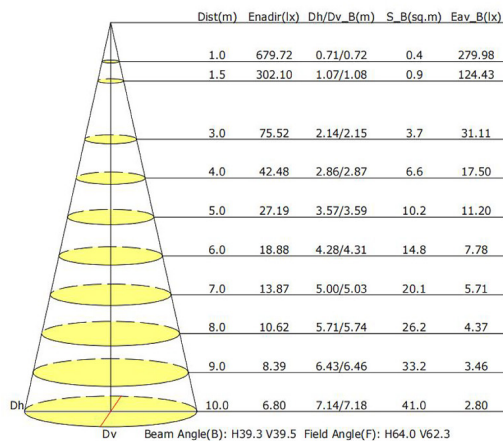




SPECIFICATION SHEET

BALZO VI SERIES

PHOTOMETRIC INFORMATION / 40D

COLOR TEMPERATURE / RGBW

Luminous Intensity Distribution Curve

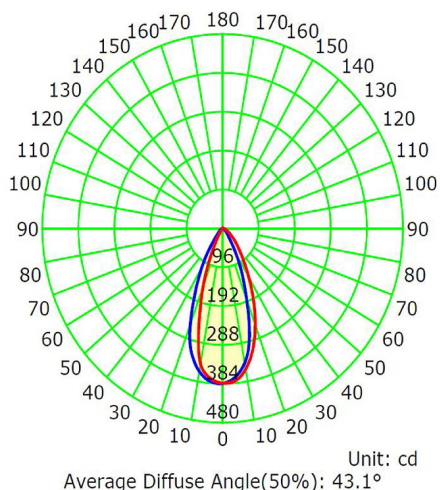

Illuminance at a Distance

