




SPECIFICATION SHEET

TRACK-OP-080-TL

TRIMLESS

FEATURES

- Material: anodized aluminum 6063
- Lighting source width: Max 28mm
- Installation: Trimless recessed in drywall
- Profile length: 1 meter and 2 meters
- Cover material: PMMA, PC
- Opal cover

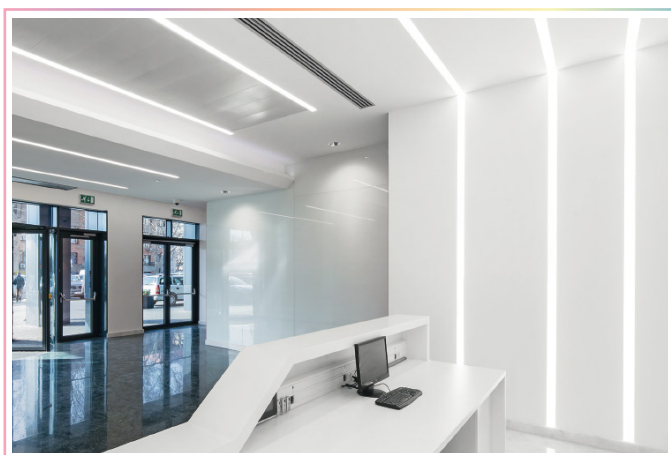


LED LINEAR TRIMLESS TRACKS

TRACK-OP-080-1M-TL

TRACK-OP-080-2M-TL




ACCESSORIES

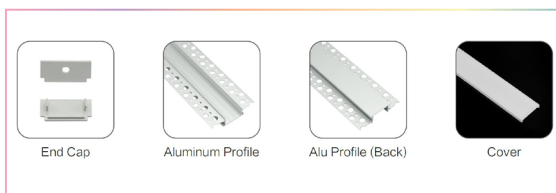

PRODUCT CODES & COMPATIBLE ACCESSORIES

MODEL	DESCRIPTION
1 Meter	
TRACK-OP-080-1M-TL	Trimless Aluminum Profile - 1M
2 Meters	
TRACK-OP-080-2M-TL	Trimless Aluminum Profile - 2M
Accessories	
CVR-OP-080-1M	Diffuser for TRACK-OP-080-1M-TL
CVR-OP-080-2M	Diffuser for TRACK-OP-080-2M-TL
TR-ENDCAPS-080	End Caps 080 (2 Pack)

TRACK DIMENSIONS

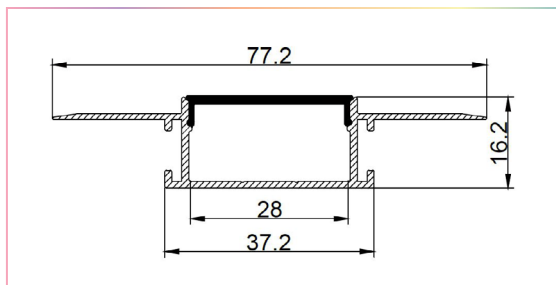

TAPE COMPATIBILITY CHART

FULLY DIFFUSED



COMPATIBLE TAPES

TAPE-COB-W30K
 TAPE-COB-DW
 TAPE-COB-BI
 TAPE-COB-RGBW


PARTIAL DIFFUSION



COMPATIBLE TAPES

TAPE-30-RGB
 TAPE-60-RGB
 TAPE-60-W30K
 TAPE-60-RGBW
 TAPE-180-RGB+WW
 *TAPE-240-RGBW (Double Row Tape)
 *TAPE-256-BI-R1 (Double Row Tape)

INSTALLATION VIEW

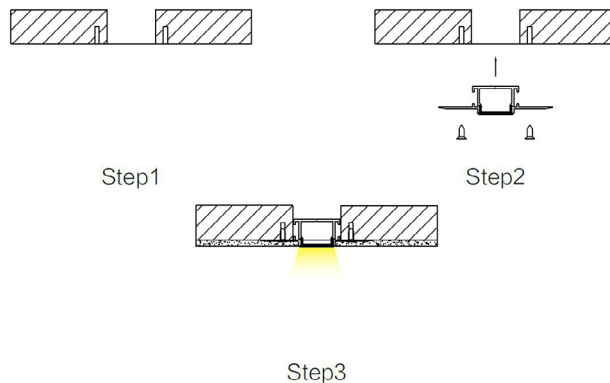

TYPICAL APPLICATIONS

- Vertical and horizontal ceiling applications

ADVANTAGES

- Specifically designed as mounted light bars
- Aluminum material can achieve a better cooling effect