



SPECIFICATION SHEET

TAPE-COB-480-W

DESCRIPTION

Colorbeam's COB (Chip-on-Board) LED Tape delivers high-performance lighting with superior brightness, efficiency, and flexibility. Its ultra-thin, bendable design provides smooth, uniform lighting for up to 5 meters (16.4 ft), perfect for creative installations.

KEY FEATURES

- Soft, Uniform Light:** COB technology ensures consistent, smooth illumination with a premium bounding wall for better light uniformity.
- Superior Durability:** Thick copper construction ensures stable voltage and brightness, with a protective structure for enhanced reliability and flexibility.
- Indoor & Outdoor Use:** Available in IP20 and IP67 waterproof options, ideal for versatile indoor and outdoor applications.
- Perfect for designers and architects,** this innovative lighting solution elevates any space with seamless beauty and functionality.



Dimmable Lighting
0 to 100% flicker free dimming



Working Temperature



3 Year Limited
Warranty

SPECIFICATIONS

Power	12W/m
Input Voltage	24VDC
Chip QTY	480chips/m [146chips/ft]
Chip Current	8mA/chip
Dimensions - IP20	5000 * 10 * 2.3mm [197*0.39*.09in]
Dimensions - IP67	5000*10*4mm [197*0.39*0.16in.]
Color Temperature	2700K 3000K 4000K
CRI:	W: Ra≥90
Beam Angle	150°
Standard Length:	5m [16.4 FT] (power fed on one side)
Light Source	COB (Chip On Board)
Warranty:	3 years
Certificate:	CE, RoHS, UL Listed

MODEL CODES	DESCRIPTION
TAPE-COB-W27K-IP20	White COB Tape, 2700K, 12W/m, 24V, 480 chips/m, 14W/M, 5M/roll, IP20
TAPE-COB-W27K-IP67	White COB Tape, 2700K, 12W/m, 24V, 480 chips/m, 14W/M, 5M/roll, IP67
TAPE-COB-W30K-IP20	White COB Tape, 3000K, 12W/m, 24V, 480 chips/m, 14W/M, 5M/roll, IP20
TAPE-COB-W30K-IP67	White COB Tape, 3000K, 12W/m, 24V, 480 chips/m, 14W/M, 5M/roll, IP67
TAPE-COB-W40K-IP20	White COB Tape, 3000K, 12W/m, 24V, 480 chips/m, 14W/M, 5M/roll, IP20
TAPE-COB-W40K-IP67	White COB Tape, 3000K, 12W/m, 24V, 608 pcs/m, 14W/M, 5M/roll, IP67



COLOR TEMPERATURE



2700K 3000K 4000K

TYPICAL APPLICATIONS

- ✓ Accent lighting
- ✓ Decorative lighting
- ✓ Architectural lighting

www.colorbeamlighting.com



SPECIFICATION SHEET
TAPE-COB-480-W

Luminous Flux Specification

Part Number	Dimensions (L*W*H)	Luminous Flux \pm 10% (2700K)	Light Efficiency (2700K)	Luminous Flux \pm 10% (3000K)	Light Efficiency (3000K)	Luminous Flux \pm 10% (4000K)	Light Efficiency (4000K)
TAPE-COB-480-W30K-IP20	5000*10*2.3mm [197*0.39*0.09]	1164Lm/m [335Lm/ft]	97lm/w	1176Lm/m [359Lm/ft]	98lm/w	1320Lm/m [402Lm/ft]	110lm/w
TAPE-COB-480-W30K-IP67	5000*12*4mm [197*0.47*0.16]	1104Lm/m [337Lm/ft]	92lm/w	1116Lm/m [340Lm/ft]	93lm/w	1260Lm/m [384Lm/ft]	105lm/w



Power & Brightness vs Length Characteristics

Length Of Single Product	1m [3.28FT]	2m [6.56FT]	3m [9.48FT]	4m [13.1FT]	5m [16.4FT]
Actual Measured Power	12.2W	23.8W	34.1W	42.3W	49.1W
Power Maintenance Rate	100%	97.5%	93.2%	86.7%	80.5%
Brightness Maintenance Rate	100%	95.3%	91.8%	87.9%	80.6%

Picture & Diagram



Unit: mm[in.]

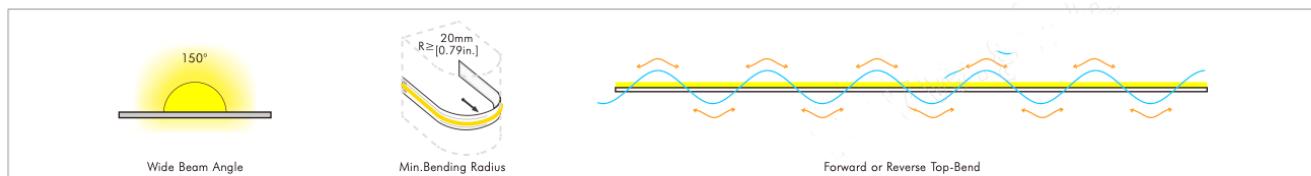
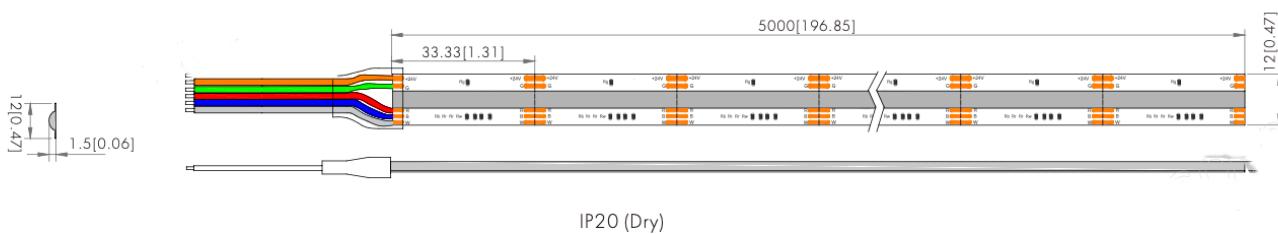


www.colorbeamlighting.com



SPECIFICATION SHEET
TAPE-COB-480-W

Light Distribution Diagram

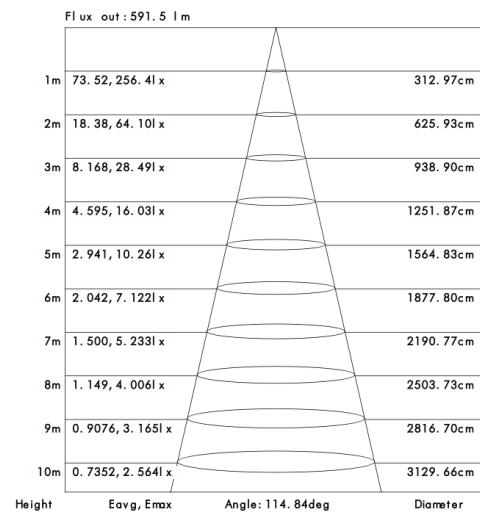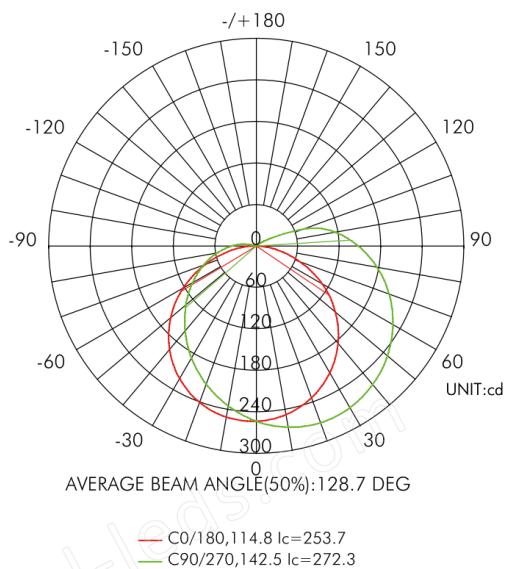

3000K, IP20 (dry)

www.colorbeamlighting.com